



***Elektrosvit***

Catalogue 2020-2021  
*Lighting technology*

**CERTIFICATE**

Certification Body Management System No. 3053  
TUV SUD Czech s.r.o.

certifies that

**Elektrovit**  
Svatobořice a.s.

**ELEKTROSVIT Svatobořice, a.s.**  
Nádražní 1290/44  
CZ - 696 04 Svatobořice-Mladějov  
Měst. No. 48437313

has established and applies a Quality Management System for

- luminaire production for explosive atmospheres and harsh areas
- production of industrial and special luminaires
- luminaire production for public lighting and accessories

An audit was performed, Report No. 12.765.381  
Proof has been furnished that the requirements according to

**ČSN EN ISO 9001:2016**

are fulfilled.

The certificate is valid from 04.01.2020 until 08.11.2022  
Certificate Registration No. 12.765.148

ISO 9001:2015 cert. s.r.o. • Novoborská 204 • 102 71 Praha 10 • Česká republika • info@elektrovit.cz • www.elektrovit.cz

**CERTIFIKÁT**

Certifikát nabytí systému managementu č. 3053  
TUV SUD Czech s.r.o.

potvrzuje, že společnost

**Elektrovit**  
Svatobořice a.s.

**ELEKTROSVIT Svatobořice, a.s.**  
Nádražní 1290/44  
CZ - 696 04 Svatobořice-Mladějov  
IČ: 48437313

zavádí a používá systém managementu kvality v rozsahu

- výroba světlotělnů do prostředí s nebezpečnou atmosférou a do srovnatelných prostředí
- výroba průmyslových a speciálních světlotělnů
- výroba světlotělnů pro veřejné osvětlení a příslušenství

Na základě vykonaného auditu, číslo 12.765.381  
bylo prokázáno splnění požadavků normy

**ČSN EN ISO 9001:2016**

Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020  
Registrační číslo certifikátu 12.765.148

ISO 9001:2015 cert. s.r.o. • Novoborská 204 • 102 71 Praha 10 • Česká republika • info@elektrovit.cz • www.elektrovit.cz

**ZERTIFIKAT**

Das Zertifizierungsamt Management-Systeme No. 3053  
TUV SUD Czech s.r.o.

bestätigt, dass die Unternehmung

**Elektrovit**  
Svatobořice a.s.

**ELEKTROSVIT Svatobořice, a.s.**  
Nádražní 1290/44  
CZ - 696 04 Svatobořice-Mladějov  
IČ: 48437313

für die Umgebungsleistung

- Herstellung von Lampen für explosionsgefährdete und anspruchsvolle Bereiche
- Herstellung von Lampen für spezielle und industrielle Bereiche
- Herstellung von Lampen für Straßenbeleuchtung und Zubehör

Ein Qualitätsmanagementsystem entspricht der und anwendet

Die Norm EN ISO 9001:2016  
Nachdem die Nachweise erbracht, dass die Anforderungen der

**ČSN EN ISO 9001:2016**

erfüllt sind, wurde die Zertifizierung am 04.01.2020 bis 08.11.2022  
Zertifikat-Registrierung-Nr. 12.765.148

ISO 9001:2015 cert. s.r.o. • Novoborská 204 • 102 71 Praha 10 • Česká republika • info@elektrovit.cz • www.elektrovit.cz

**СЕРТИФИКАТ**

Система менеджмента качества менеджмента сист. 3053  
TUV SUD Czech s.r.o.

сертифицирует, что компания

**Elektrovit**  
Svatobořice a.s.

**ELEKTROSVIT Svatobořice, a.s.**  
Nádražní 1290/44  
CZ - 696 04 Svatobořice-Mladějov  
IČ: 48437313

внедряет и использует систему менеджмента качества в области

- производства осветительных приборов для помещений с повышенной опасностью и с аналогичными условиями
- производства промышленных и специальных осветительных приборов
- производства осветительных приборов для наружного освещения и сопутствующих изделий

На основании проведенного аудита, номер 12.765.381  
было подтверждено соответствие требованиям стандарта

**ČSN EN ISO 9001:2016**

Продолжительность действия сертификата 04.01.2020 до 08.11.2022  
Регистрационный номер сертификата 12.765.148

ISO 9001:2015 cert. s.r.o. • Novoborská 204 • 102 71 Praha 10 • Česká republika • info@elektrovit.cz • www.elektrovit.cz

**EKO KOM**  
Environmentally friendly technology

Společnost ELEKTROSVIT Svatobořice a.s. (IČ: 48437313) je uváděna jako výrobce výrobků, jejichž výroba je v souladu s principy ekologického designu. Průběh auditu je popsán ve zprávě 12.765.381 ze dne 04.01.2020. Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020. Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020. Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020.

**ELEKTROSVIT Svatobořice, a.s.**  
Nádražní 1290/44  
CZ - 696 04 Svatobořice-Mladějov  
IČ: 48437313

Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020. Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020. Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020.

**ekolamp**

Společnost EKO LAMP s.r.o. (IČ: 271 213 48 801) je uváděna jako výrobce výrobků, jejichž výroba je v souladu s principy ekologického designu. Průběh auditu je popsán ve zprávě 12.765.381 ze dne 04.01.2020. Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020. Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020.

**OSVĚDČENÍ**

**ELEKTROSVIT Svatobořice, a.s.**  
Nádražní 1290/44, Svatobořice-Mladějov, 69604

0027305-ECZ  
48437313

Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020. Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020. Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020.

**FTZU**  
Fyzikální technický zkušební ústav  
Ostrava-Radvanice

**OZNÁMENÍ O ZABEZPEČOVÁNÍ JAKOSTI**

Objekt: ELEKTROSVIT Svatobořice, a.s., Nádražní 1290/44, Svatobořice-Mladějov, IČ: 48437313

Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020. Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020. Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020.

**FTZU**  
Fyzikální technický zkušební ústav  
Ostrava-Radvanice

**OZNÁMENÍ O ZABEZPEČOVÁNÍ JAKOSTI**

Objekt: ELEKTROSVIT Svatobořice, a.s., Nádražní 1290/44, Svatobořice-Mladějov, IČ: 48437313

Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020. Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020. Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020.

**FTZU**  
Fyzikální technický zkušební ústav  
Ostrava-Radvanice

**QUALITY ASSURANCE NOTIFICATION**

Objekt: ELEKTROSVIT Svatobořice, a.s., Nádražní 1290/44, Svatobořice-Mladějov, IČ: 48437313

Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020. Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020. Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020.

**РАЗРЕШЕНИЕ**

Объект: ELEKTROSVIT Svatobořice, a.s., Nádražní 1290/44, Svatobořice-Mladějov, IČ: 48437313

Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020. Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020. Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020.

**СИСТЕМА СЕРТИФИКАЦИИ ГОСТ Р**

**СЕРТИФИКАТ СООТВЕТСТВИЯ**

Объект: ELEKTROSVIT Svatobořice, a.s., Nádražní 1290/44, Svatobořice-Mladějov, IČ: 48437313

Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020. Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020. Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020.

**СИСТЕМА СЕРТИФИКАЦИИ ГОСТ Р**

**СЕРТИФИКАТ СООТВЕТСТВИЯ**

Объект: ELEKTROSVIT Svatobořice, a.s., Nádražní 1290/44, Svatobořice-Mladějov, IČ: 48437313

Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020. Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020. Průběh certifikace je popsán ve zprávě 12.765.381 ze dne 04.01.2020.



# Introduction

**Dear business partners, dear friends,**

**We are presenting our latest issue of ELEKTROSVIT Svatobořice, a.s. traditional Czech manufacturer of electrical lighting units with over a hundred-year tradition, production program catalogue.**

## **Company history**

The original production plant was built by Mr. Jindřich Wiktorin in 1906 near the railway line in the village Svatobořice, about 50 km from the city of Brno in the centre of South Moravia. Since 1950, the plant was part of Elektrosvit Group. In 1993, the subsidiary was transformed into state-owned joint stock company ELEKTROSVIT Svatobořice, a.s. Since 2002 the shares of the company have been held privately.

## **Main production program**

In consists of electric lamps for different types of light sources: LED modules, bulbs, high pressure sodium, mercury and halide lamps, linear and cost-saving fluorescent lamps. Depending on the purpose, we produce light fitting for outdoor lighting of roads, parks and orchards, as well as industrial, interior, special and headlamps. **The specialty of our production program is explosion-proof light fittings designed for fire and explosion risk (Ex) thermal and hydropower plants, paint shops, paper mills, mills etc.** The assortment of light fittings, including accessories, is at a high technical level given by a long tradition and constant modernizing.

## **Supplementary range**

In addition to the production program of our company, we also offer light sources, electric lighting poles, booms and other necessary accessories, including adjusting the products according to the customers request, colour design or custom-made light fitting production to ensure a complete supply of lighting equipment.

## **Custom production**

Made on our CNC machinery (lathe, hydraulic press bake HACO, milling machine, boring center), drilling, welding, milling and pressing, powder coating.

## **Certificates**

ELEKTROSVIT Svatobořice, a.s., strives to meet its customers' demands by constantly innovating assortment with the aim of improving technical parameters, increasing reliability, service life, covering and reducing power consumption with simultaneous design improvements and environmental aspects of production.

We are involved in the EKO-KOM system, which assures the combined fulfilment of the obligation to take back and recover waste from packaging (client number EK-F06020595). All the light fittings standardly manufactured by ELEKTROSVIT Svatobořice, a.s. are subject to a declaration of conformity according to the valid legislation. At the same time, the light fittings are manufactured in accordance with ČSN EN European standards. The AO 210 – FTZÚ Radvanice provides certification in accordance with the requirements of ATEX 2014/34/EU international standard. For Eastern markets, EAC certificates are issued for export of products to the customs union (Russia, Belarus, Kazakhstan). Since 2001, our company has been a holder of the Quality Management Certificate according to ČSN EN ISO 9001:2016 standard certified by TÜV CZ. The „ELEKTROSVIT“ trademark is protected by the trademark of the Industrial Property Office under No. 251515.

### **Sales**

The sales department emphasizes meeting of all the customers requirements. Current business activities are oriented primarily on the Czech market through contractual wholesale partners, assembly companies engaged in turnkey projects, design offices. Export activities are directed mainly to the Slovak market and to the countries of Central, Eastern and South-Eastern Europe, the EU and the Middle East.

### **Presentation, exhibitions, trainings**

The company is presented at domestic and foreign trade fairs and on regular professional seminars focused on lighting technology. Designers and all business partners are provided free designs for indoor and outdoor lighting. We regularly organize trainings, provide consultancy in the field of lighting technology.

Any additional information about our company, offered assortment, delivery times, terms of business, rebates, etc. can be found on the company website

**[www.elektrosvit.cz](http://www.elektrosvit.cz)**

**We invite all interested parties to make contact, whether personal or written. We look forward to further successful cooperation with all our business partners!**



## Explosion-proof light fittings



**MINIMINEX LED**  
page 8



**MINEX I**  
page 9



**ORION LED**  
page 10



**ORION**  
page 10



**SIRIUS**  
page 12



**HERKULES**  
page 13



**ERIS**  
page 14



**BILUX LED**  
page 14



**TRILUX LED**  
page 15



**MULTISAFE LED**  
page 15



**SIMPLEX**  
page 16



**BILUX**  
page 17



**TRILUX**  
page 18



**SAFELUX/MULTISAFE**  
page 19



**LINEX**  
page 19



**ZONEX**  
page 20

COMING SOON

**ZONEX LED**  
page 22



**BOX 2**  
page 21



COMING SOON

**SIRIUS LED**  
page 22



COMING SOON

**HERKULES LED**  
page 23



COMING SOON

**LINEX LED**  
page 23

## Industrial light fittings



**PEGAS LED**  
page 25



**JUNIOR LED**  
page 25



**FARMER I LED**  
page 26



**FARMER II LED**  
page 26



**TUB LED**  
page 27



**TURTLE LED**  
page 28



**ES STP LED**  
page 28



**PRACHO LED**  
page 29



**FARMER I**  
page 30



**FARMER II**  
page 31



**FARMER III**  
page 32



**JUNIOR**  
page 32



**PEGAS**  
page 33



**TUB**  
page 33



**TURTLE**  
page 34



**PRACHO**  
page 35



**RESIST**  
page 35



**MERIDIAN/  
MERIDIAN ALSi**  
page 36



**SACHO**  
page 37



**SACHO LED**  
page 37



**MACHINE**  
page 38

## Floodlights



**RPG I, II**  
page 40



**HALSPOT I, II**  
page 40



**TITAN**  
page 41



**Ballast box BOX T**  
page 41



**SPOT I**  
page 42



**SPOT II**  
page 42



**Ballast box BOX 7**  
page 43

## Outdoor light fittings



**SADOVKA**  
page 45



**KUZEL**  
page 45



**KOULE A**  
page 46



**KOULE B**  
page 47



**AURIS**  
page 47



**LUCERNA**  
page 48



**OPAL**  
page 48



**RAMINKO**  
page 49




**Explosion-proof light fittings**

# MINIMINEX LED

IM2 Ex db op is IMb  IP 65

**Use:** Explosion-proof light fitting for the illumination of mine spaces with a danger of methane and coal dust explosion.

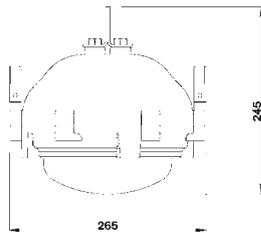

**Technical description:** The body and flange of the light fitting are grey iron castings finished with RAL 1005 powder paint. The optical cover is made of tempered glass. A steel suspension with an eye is fixed to the top part of the body. There are two cable outlets on the light fitting sides. There is an LED module built inside the light fitting and it is comprised of a board fitted with LEDs and a power supply. The contact surface between the flange and the body of the light fitting makes up the cylindrical joint of the explosion-proof cap „d“. The light fitting is designed as a through light fitting, for three-phase connection (five-core cable). When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 3 mm<sup>2</sup>.

	230V 50Hz		IP65	<b>ATEX</b> 2014/34/EU
			3F	<b>Ta</b> -20°C ÷ +40°C
<b>Carton (mm/pcs): 300 x 260 x 290 / 1</b>				

**Installation:** With a steel suspension with an eye  $\varnothing 18$  mm.

**Versions:** The light fittings are made in a version with an electronic adjustable ballast (EVG DIMM) which enables the adjusting of the luminous flux and thus the light fitting power inlet to 50%. Light fittings are provided with a self-resetting thermal fuse and a surge guard up to 3 kV.

**To order:**

Spanner 4-99.6212 (for tightening cable outlets).



Type	Power input [W] / Luminous flux [lm]	Luminous efficiency [lm/W]	Angle of beam [°]	Colour temperature [K]	CRI	Weight [kg]
59140 01	25 / 2600	104	120	4500	>80	14




# MINEX I

Zone 1/21 I M2 Ex d I Mb  
II 2G Ex d IIB T4-T6 Gb

**Ex** IP 65

Zone 2/22 II 2D Ex tb IIIC Tmax. of surface Db

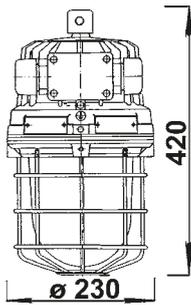

**Use:** Explosion-proof light fitting for the illumination of mine spaces with a danger of methane and coal dust explosion as well as industrial spaces with a danger of gas, vapour and dust explosion.

**Technical description:**

The body and flange of the light fitting are grey iron castings finished with RAL 1005 powder paint. The optical cover is made of tempered glass. A steel suspension with an eye is fixed to the top part of the body. There are two cable outlets on the light fitting sides. There is an LED module built inside the light fitting and it is comprised of a board fitted with LEDs and a power supply. The contact surface between the flange and the body of the light fitting makes up the threaded joint of the explosion-proof cap „d“. The light fitting is designed as a through light fitting, the terminal board allows two phase alternation (four-core cable). When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

**Installation:**

With a steel suspension with an eye ø18 mm.

**To order:**



Shade  
254.5021/01



Protective basket  
2-99.7461



Spanner  
3-99.6158/1



Holder for mounting  
on the ceiling  
4-99.8103



Holder for mounting  
on the wall  
338.2735

CE	230V 50Hz	IP65	ATEX 2014/34/EU
VVG	220V DC	E27	Ta -20°C ÷ +40°C
Carton (mm/pcs): 430 x 240 x 240 / 1			

Type	Recommended light source [W]	Temperature class	T max. of surface [°]	Voltage [V/Hz]	Weight [kg]
511 37 01	Halogen bulb Philips Eco Classic 140	T4	105	230/50	18
	Halogen bulb Philips EcoClassic 105	T5	91	230/50	
	Halogen bulb Philips EcoClassic 70	T6	79	230/50	
	Compact fluorescent tube Philips Master PL Electronic 23	T6	62	230/50	
	Bulb CLAS 200	T4	105	230/50	
	Bulb CLAS 150	T5	92	230/50	
	Bulb CLAS 60-100	T6	80	230/50	
	Compact fluorescent tube DULUX EL 23	T6	60	230/50	
	Blended lamp HWL 160	T5	90	230/50	
541 33 02	Bulb CLAS 100	T5	85	220 V DC	19
	High-pressure mercury discharge lamp HQL 125	T4	121	230/50	
	High-pressure sodium discharge lamp NAV-E 110/I	T4	100	230/50	

# ORION LED IP 66

**Zone 1/21 II 2G Ex db eb op is IIC T5-T6 Gb**  
**Zone 2/22 II 2D Ex tb IIIC Tmax. of surface Db**



	230V 50Hz		IP66	<b>ATEX</b> 2014/34/EU
			<b>Ta</b>	-40°C ÷ +50°C (T5) -40°C ÷ +40°C (T6)
220-230V AC 170-276V DC		<b>Carton (mm/pcs):</b> 410 x 240 x 240 / 1		

**Use:** Explosion-proof light fitting for the illumination of indoor and outdoor industrial spaces with a danger of gas, vapour and dust explosion.

**Technical description:**

The body and flange of the light fitting are AlSi alloy castings finished with RAL 1005 powder paint. The optical cover is made of tempered glass. A steel suspension with an eye is fixed to the top part of the body. There are two cable outlets on the light fitting sides. There is an LED module built inside the light fitting and it is comprised of a board fitted with LEDs and a power supply. The light fitting is designed as a through light fitting, for two phase alternation (four-core cable). When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

**Installation:**

With a steel suspension with an eye ø18 mm. Versions: Light fittings are made in a version with an electronic adjustable ballast (EVG DIMM) which enables the adjusting of the luminous flux and thus the light fitting power inlet to 50%. Light fittings are provided with a self-resetting thermal fuse and a surge guard up to 3 kV. Standard light fittings are available with cable outlets M25x1.5, optionally with cable outlets M20x1.5.

**To order:**



Type	Power input [W] / Luminous flux [lm]	Luminous efficiency [lm/W]	Temperature class	T max of surface [°C]	Angle of beam [°]	Colour temperature [K]	CRI	Weight [kg]
591 39 04 (K)	45 / 6000	133	T5	83	120	4000	>80	10
	25 / 3000	120	T6	73	120	4000	>80	10

\* By adding letter „K“ behind type designation, light fittings will be provided with protective steel baskets (591 39 04K).

# ORION IP 65

**Zone 1/21 II 2G Ex db eb IIC T4-T6 Gb**  
**Zone 2/22 II 2D Ex tb IIIC Tmax. of surface Db**



	230V 50Hz		IP65	<b>ATEX</b> 2014/34/EU
	220V DC		<b>Ta</b>	-20°C ÷ +40°C -20°C ÷ +50°C version „I“ -50°C ÷ +40°C version „F“
<b>Carton (mm/pcs):</b> 410 x 240 x 240 / 1		430 x 240 x 240 / 1 K		

**For version „F“**

**Zone 1/21 II 2G Ex db eb IIB T4-T6 Gb**  
**Zone 2/22 II 2D Ex tb IIIC Tmax. of surface Db**

**Use:** Explosion-proof light fitting for the illumination of indoor and outdoor industrial spaces with a danger of gas, vapour and dust explosion.

**Technical description:**


The body and flange of the light fitting are AlSi alloy castings finished with RAL 1005 powder paint. The optical cover is made of tempered glass. A steel suspension with an eye is fixed to the top part of the body. There are two cable outlets on the light fitting sides. The steel base plate with electrical equipment and reflector is built inside the light fitting. The light fitting is designed as a through light fitting, for two phase alternation (four-core cable). When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

**Installation:**

With a steel suspension with an eye ø18 mm.

**Versions:**

Standard light fittings are available with cable outlets M25x1.5, optionally with cable outlets M20x1.5.

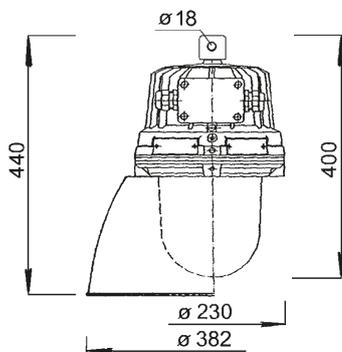

To order:



Shade  
254.5021/01



Protective basket  
2-99.7461



Spanner  
3-99.6158/1



Holder for mounting on the ceiling  
4-99.7995



Holder for mounting on the wall  
338.2735



Screw plug V-Ex  
M25x1,5, M20x1,5



Blinding plug HSK-V-Ex  
M25x1,5, M20x1,5




Screw plug V-Ms-VMQ-Ex  
M25x1,5, M20x1,5

Type	Recommended light source [W]	Temperature class	T max of surface [°C]	Voltage [V/Hz]	Weight [kg]
511 37 02	Halogen bulb Philips EcoClassic 140	T4	101	230/50	8,5
	Halogen bulb Philips EcoClassic 105	T5	90	230/50	8,5
	Halogen bulb Philips EcoClassic 70	T6	77	230/50	8,5
	Compact fluorescent tube OSRAM DULUX EL Longlife 23	T6	59	230/50	8,5
	Compact fluorescent tube Philips Master PL Electronic 23	T6	63	230/50	8,5
	Compact fluorescent tube Philips Master PL Electronic Globe 23	T6	58	230/50	8,5
	Bulb CLAS 200	T4	104	230/50	8,5
	Bulb CLAS 150	T5	92	230/50	8,5
	Bulb CLAS 60-100	T6	80	230/50	8,5
	Blended lamp HWL 160	T5	90	230/50	8,5
541 33 03	High-pressure mercury discharge lamp HQL 80	T4	95	230/50	8,5
	High-pressure sodium discharge lamp NAV-E 50/I	T4	81	230/50	8,5
541 33 04	High-pressure mercury discharge lamp HQL 125	T4	121	230/50	9
	High-pressure sodium discharge lamp NAV-E 110/I	T4	99	230/50	9
541 33 06	High-pressure sodium discharge lamp NAV 70	T5	86	230/50	8,5
	High-pressure halide lamp HQI 70	T6	80	230/50	8,5
581 04 02	Compact fluorescent tube DULUX D 26	T6	60	230/50	8,5
511 37 02 t	Halogen bulb Philips EcoClassic 140	T4	111	230/50	8,5
	Halogen bulb Philips EcoClassic 105	T4	100	230/50	8,5
	Halogen bulb Philips EcoClassic 70	T6	87	230/50	8,5
	Bulb CLAS 200	T4	114	230/50	8,5
	Bulb CLAS 150	T4	102	230/50	8,5
	Bulb CLAS 60-100	T5	90	230/50	8,5
	Blended lamp HWL 160	T4	100	230/50	8,5
	Compact fluorescent tube OSRAM DULUX EL LONGLIFE 23	T6	69	230/50	8,5
	Compact fluorescent tube PHILIPS PL ELECTRONIC GLOBE 23	T6	68	230/50	8,5
	Compact fluorescent tube PHILIPS MASTER PL ELECTRONIC 23	T6	73	230/50	8,5
541 33 03 t	High-pressure mercury discharge lamp HQL 80	T4	105	230/50	8,5
	High-pressure sodium discharge lamp NAV-E 50/I	T4	91	230/50	8,5
541 33 04 t	High-pressure mercury discharge lamp HQL 125	T3	131	230/50	9
	High-pressure sodium discharge lamp NAV-E 110/I	T4	109	230/50	9
581 04 02 t	Compact fluorescent tube DULUX D 26	T6	70	230/50	9
511 37 02 F	Halogen bulb Philips EcoClassic 140	T4	101	230/50	8,5
	Halogen bulb Philips EcoClassic 105	T5	90	230/50	8,5
	Halogen bulb Philips EcoClassic 70	T6	77	230/50	8,5
	Bulb CLAS 200	T4	104	230/50	8,5
	Bulb CLAS 150	T5	92	230/50	8,5
	Bulb CLAS 60-100	T6	80	230/50	8,5
	Blended lamp HWL 160	T5	90	230/50	8,5
541 33 04 F	High-pressure mercury discharge lamp HQL 125	T4	121	230/50	8,5
	High-pressure sodium discharge lamp NAV-E 110/I	T4	99	230/50	8,5
511 37 02 S	Bulb 100	T5	81	220 DC	8,5

\* By adding letter „K“ behind type designation, light fittings will be provided with protective steel baskets (511 37 02K, 511 37 02KF).

# SIRIUS

**Zone 1/21 II 2G Ex de IIC T3-T6 Gb**  **IP 65**  
**Zone 2/22 II 2D Ex tb IIIC Tmax. of surface Db**

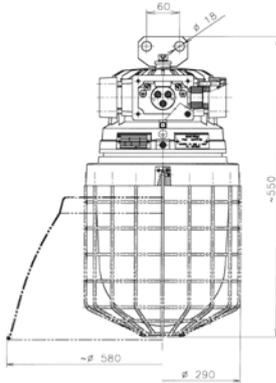

	230V 50Hz		IP65	E40
ATEX 2014/34/EU		<b>Ta</b> -20°C ÷ +40°C -20°C ÷ +50°C version „t“ -50°C ÷ +40°C version „F“		
Carton (mm/pcs): 560 x 350 x 300 / 1				

**Use:** Explosion-proof light fitting for the illumination of indoor and outdoor industrial spaces with a danger of gas, vapour and dust explosion.

**Technical description:**

The body and flange of the light fitting are AlSi alloy castings finished with RAL 1005 powder paint. The optical cover is made of tempered glass. A steel suspension with eye is fixed to the top part of the body. There are two cable outlets on the sides of the light fitting. The steel base plate with electrical equipment and reflector is built inside the light fitting. The light fitting is designed as a through light fitting, for two phase alternation (four-core cable). When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

**Installation:**

With steel suspensions with eyes ø18 mm.


**Versions:**

Standard light fittings are available with cable outlets M25x1.5, optionally with cable outlets M20x1.5.

**To order:**



Shade  
154.5041/02



Protective basket  
1-99.5856



Spanner  
3-99.6159



Screw plug V-Ex  
M25x1,5  
M20x1,5



Blinding plug  
HSK-V-Ex  
M25x1,5  
M20x1,5



Screw plug  
V-MS-VMQ-Ex  
M25x1,5  
M20x1,5

Type	Recommended light source [W]	Temperature class	T max. of surface [°C]	Voltage[V/Hz]	Weight/with protective basket [kg]
511 38 02	Bulb SPC.A T CL 500	T4	115	230 / 50	12/14
	Bulb SPC.A T CL 300	T4	95	230 / 50	12/14
	Blended lamp HWL 500	T3	150	230 / 50	12/14
	Bulb CLAS 200	T6	78	230 / 50	12/14
	High-pressure sodium discharge lamp 210	T4	100	230 / 50	12/14
	High-pressure sodium discharge lamp 350	T4	120	230 / 50	12/14
511 38 02 t	Bulb SPC.A T CL 500	T4	125	230 / 50	12/14
	Bulb SPC.A T CL 300	T4	105	230 / 50	12/14
	Bulb CLAS 200	T5	88	230 / 50	12/14
	High-pressure sodium discharge lamp 210	T4	110	230 / 50	12/14
511 38 02 F	Bulb SPC.A T CL 500	T4	115	230 / 50	12/14
	Bulb SPC.A T CL 300	T4	95	230 / 50	12/14
	Bulb CLAS 200	T6	78	230 / 50	12/14
	High-pressure sodium discharge lamp 250	T4	105	230 / 50	12/14

\* By adding letter „K“ behind type designation, light fittings will be provided with protective steel baskets (511 38 02 K, 511 38 02 Kt).



# HERKULES

**Zone 1/21 II 2G Ex db eb IIC T3-T6 Gb IP 65**  
**Zone 2/22 II 2D Ex tb IIIC Tmax. of surface Db**

**Use:** Explosion-proof light fitting for the illumination of indoor and outdoor industrial spaces with a danger of gas, vapour and dust explosion.

**Technical description:**

The body and flange of the light fitting are AlSi alloy castings finished with RAL 1005 powder paint. The optical cover is made of tempered glass. A locking steel holder with eyes  $\varnothing 12.5$  mm is fixed to the body. There are two cable outlets on the light fitting sides. There is electrical equipment and a reflector built inside the light fitting. The light fitting is designed as a through light fitting, for three-phase connection (five-core cable). When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.


**Installation:**

With a steel suspension with eyes  $\varnothing 12.5$  mm, using a wall holder 3-99.6183.

**To order:**



Shade  
154.5041/02



Protective basket  
1-99.5856



Spanner  
3-99.6159



Screw plug V-Ex  
M25x1,5  
M20x1,5



Blinding plug  
HSK-V-Ex  
M25x1,5  
M20x1,5



Screw plug  
V-Ms-VMQ-Ex  
M25x1,5  
M20x1,5

	230V 50Hz		IP65	VVG
ATEX 2014/34/EU		E40	Ta -20°C ÷ +40°C -20°C ÷ +55°C version „I“ -50°C ÷ +55°C version „Ft“	
Carton (mm/pcs): 800 x 400 x 400 / 1				

Type	Recommended light source [W]	Temperature class	T max. of surface [°C]	Voltage [V/Hz]	Weight / with protective basket [kg]
541 38 03	High-pressure mercury discharge lamp HQL 250	T5	87	230 / 50	26 / 27,5
	High-pressure sodium discharge lamp NAV-E/I 210	T5	87	230 / 50	26 / 27,5
541 38 04	High-pressure mercury discharge lamp HQL 400	T3	135	230 / 50	27 / 28,5
	High-pressure sodium discharge lamp NAV-E/I 350	T3	135	230 / 50	27 / 28,5
541 38 05	High-pressure sodium discharge lamp NAV-E 250	T4	105	230 / 50	26 / 27,5
	High-pressure halide discharge lamp HQL-E 250	T4	105	230 / 50	26 / 27,5
541 38 06	High-pressure sodium discharge lamp NAV-E 400	T3	135	230 / 50	27 / 28,5
541 38 07	High-pressure halide discharge lamp HQL-E 400	T3	135	230 / 50	27 / 28,5
541 38 08	High-pressure halide discharge lamp HCI-TT 150	T6	79	230 / 50	25 / 26,5
	High-pressure sodium discharge lamp NAV-E 150	T6	79	230 / 50	25 / 26,5
541 38 03 t	High-pressure mercury discharge lamp HQL 250	T4	102	230 / 50	26 / 27,5
	High-pressure sodium discharge lamp NAV-E/I 210	T4	102	230 / 50	26 / 27,5
541 38 04 t	High-pressure mercury discharge lamp HQL 400	T3	150	230 / 50	27 / 28,5
	High-pressure sodium discharge lamp NAV-E/I 350	T3	150	230 / 50	27 / 28,5
541 38 05 t	High-pressure halide discharge lamp HQL-E 250	T4	120	230 / 50	26 / 27,5
	High-pressure sodium discharge lamp NAV-E 250	T4	120	230 / 50	26 / 27,5
541 38 06 t	High-pressure sodium discharge lamp NAV-E 400	T3	150	230 / 50	27 / 28,5
541 38 07 t	High-pressure halide discharge lamp HQL-E 400	T3	150	230 / 50	27 / 28,5
541 38 08 t	High-pressure halide discharge lamp HCI-TT 150	T5	94	230 / 50	25 / 26,5
	High-pressure sodium discharge lamp NAV-E 150	T5	94	230 / 50	25 / 26,5
541 38 05 Ft	High-pressure halide discharge lamp HQL-E 250	T4	120	230 / 50	26 / 27,5
	High-pressure sodium discharge lamp NAV-E 250	T4	120	230 / 50	26 / 27,5
541 38 06 Ft	High-pressure sodium discharge lamp NAV-E 400	T3	150	230 / 50	27 / 28,5
541 38 07 Ft	High-pressure halide discharge lamp HQL-E 400	T3	150	230 / 50	27 / 28,5

\* By adding the letter „K“ after a type designation, the light fittings will be provided with protective baskets (541 38 03K). Weight of basket is 1,5kg.

# ERIS LED

**II 3G Ex nR IIC T6 Gc**  
**Zone 2/22 II 3D Ex tc IIIC T75°C Dc**



**Use:** Explosion-proof light fitting for the illumination of indoor and outdoor industrial spaces with the danger of gas, vapour and dust explosion.

**Technical description:** The body and flange of the light fitting are AlSi alloy castings finished with RAL 1005 powder paint. The optical cover is made of tempered glass. There are two cable outlets on the light fitting sides. There is an LED module built inside the light fitting and it is comprised of a board fitted with LEDs and a power supply. The light fitting is designed as a through light fitting, for a three-phase connection (five-core cable). When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

**Installation:** With a suspension eye ø19 mm, ceiling holder 4-99.8103, flexible suspension 2-99.5550.

**Versions:** Light fittings are made in a version with an electronic adjustable ballast (EVG DIMM) which enables the adjusting of the luminous flux and thus the light fitting power inlet to 50%. Light fittings are provided with a self-resetting thermal fuse and a surge guard up to 3 kV.

CE	LED	IP66	ATEX 2014/34/EU
EVG	EVG DIMM	198-264V AC 170-267V DC	Ta -40°C ÷ +50°C
Carton (mm/pcs): 410 x 240 x 240 / 1			

**To order:**



Shade  
254.5021/01



Ceiling holder  
4-99.7995



Flexible suspension  
2-99.5550




Screw plug  
V-Ms-VMQ-Ex  
M20x1,5

Type	Power input [W] / Luminous flux [lm]	Luminous efficiency [lm/W]	Angle of beam [°]	Colour temperature [K]	CRI	Weight [kg]
59115 01n	30 / 3880	129	120	4000	>80	6

# BILUX LED

**II 3G Ex nR IIC T6 Gc**  
**Zone 2/22 II 3D Ex tc IIIC Tmax. of surface Dc**

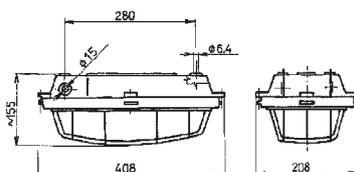

**Use:** Explosion-proof light fitting for the illumination of indoor and outdoor industrial spaces with the danger of gas, vapour and dust explosion.

**Technical description:**

The body and flange of the light fitting are AlSi alloy castings finished with RAL 1005 powder paint. The optical cover is made of hardened glass. There are two cable outlets on the light fitting sides. There is an LED module built inside the light fitting and it is comprised of a board fitted with LEDs and a power supply. The light fitting is designed as a through light fitting, for three-phase connection (five-core cable). When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

**Installation:** On the ceiling, wall or another solid substrate (structure) ensuring firm connection.

**Versions:** Light fittings are made in a version with an electronic adjustable ballast (EVG DIMM) which enables the adjusting of the luminous flux and thus the light fitting power inlet to 50%. Light fittings are provided with a self-resetting thermal fuse and a surge guard up to 3 kV.

CE	LED	IP66	ATEX 2014/34/EU
EVG	EVG DIMM	Ta -40°C ÷ +40°C version „n“ -40°C ÷ +50°C version „nt“	
version „n“	90-264V AC 127-370V DC	version „nt“	198-268V AC 170-376V DC
Carton (mm/pcs): 410 x 460 x 170 / 2			

**To order:**



Protective basket  
1-99.5992/1



Protective glass  
132.5069



Screw plug  
V-Ms-VMQ-Ex  
M20x1,5

Type	Power input [W] / Luminous flux [lm]	Temperature class	T max of surface [°]	Luminous efficiency [lm/W]	Angle of beam [°]	Colour temperature [K]	CRI	Weight [kg]
59132 01n	35 / 3550	T6	64	101	120	4000	>80	5
59132 01nt	25 / 2600	T6	68	104	120	4000	>80	5

# TRILUX LED

**II 3G Ex nR IIC T6 Gc** **Ex IP 66**  
**Zone 2/22 II 3D Ex tc IIIC Tmax. of surface Dc**


**Use:** Explosion-proof light fitting for the illumination of indoor and outdoor industrial spaces with a danger of gas, vapour and dust explosion.

**Technical description:** The light fitting body and flange are AlSi alloy castings finished with RAL 1005 powder paint. There are two cable outlets on the body sides. There is an LED module built inside the light fitting and it is comprised of a board fitted with LEDs and a power supply. The light fitting is designed as a through light fitting, for three-phase connection (five-core cable). When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

**Installation:** On the ceiling, wall or another solid substrate (structure) ensuring firm connection.

**Versions:** The light fittings are made in a version with an electronic adjustable ballast (EVG DIMM) which enables the adjusting of the luminous flux and thus the light fitting power inlet to 50%. The light fittings are provided with a self-resetting thermal fuse and a surge guard up to 3 kV.

**To order:**

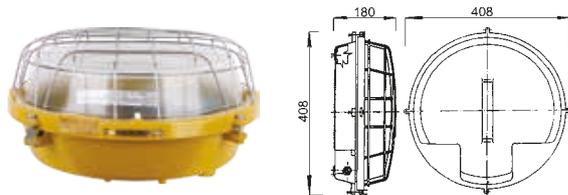

CE	LED	IP66	ATEX 2014/34/EU
EVG	EVG DIMM	220-240V AC	Ta -40°C ÷ +50°C
Carton (mm/pcs): 400 x 400 x 190 / 1			



Type	Power input [W] / Luminous flux [lm]	Luminous efficiency [lm/W]	Angle of beam [°]	Colour temperature [K]	CRI	Weight [kg]
591 33 02 n	50 / 6000	120	120	4000	>80	8

# MULTISAFE LED

**II 3G Ex nR IIC T6 Gc** **Ex IP 66**  
**Zone 2/22 II 3D Ex tc IIIC Tmax. of surface Dc**


**Use:** Explosion-proof emergency light fitting for the permanent (M) and non-permanent (NM) illumination of indoor and outdoor industrial spaces with a danger of gas, vapour and dust explosion.

**Technical description:** The body and flange of the light fitting are AlSi alloy castings finished with RAL 1005 powder paint. The optical cover is made of hardened glass. There are two cable outlets on the sides of the light fitting. There is an emergency LED module with a battery built inside the light fitting. The light fitting is designed as a through light fitting, for two phase alternation (four-core cable). When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

**Installation:** On the ceiling, wall or another solid substrate (structure) ensuring firm connection.

**Versions:** Light fittings are made in versions for permanent (M) and non-permanent (NM) emergency illumination, with autonomy of 3 hours.

**To order:**

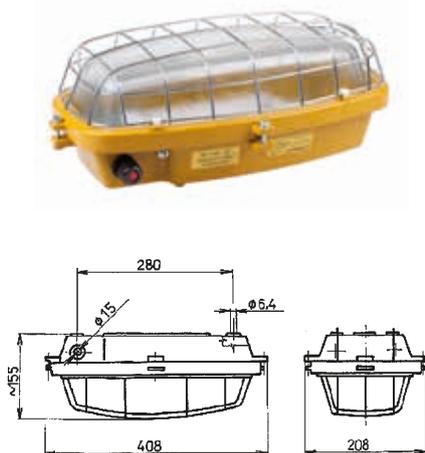


CE	EMERGENCY	IP66	ATEX 2014/34/EU
EVG	230V 50Hz	LED	Ta -20°C ÷ +40°C
Carton (mm/pcs): 430 x 240 x 180 / 1			



Type	Power input [W]	Luminous flux [lm]	Temperature class	T max. of surface [°C]	Version	Autonomy [hrs]	Weight [kg]
591 32 01 nEM	10	380	T6	55	M / NM	3	4,9

# SIMPLEX

II 3G Ex nR IIC T3-T6 Gc  IP 65  
Zone 2/22 II 3D Ex tc IIIC Tmax. of surface Dc

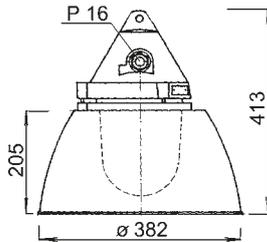

		IP65	<b>Ta</b> -20°C ÷ +40°C version „n“ -20°C ÷ +50°C version „nt“ -20°C ÷ +50°C version „nSt“ -20°C ÷ +55°C version „nS“ -40°C ÷ +40°C version „nF“ -40°C ÷ +50°C version „nFt“
VVG	E27	24-230 V DC	
230V 50Hz	ATEX 2014/34/EU	<b>Carton (mm/pcs):</b> 355 x 240 x 240 / 1	

**Use:** Explosion-proof light fitting for the illumination of indoor and outdoor industrial spaces with a danger of gas, vapour and dust explosion.

**Technical description:**

The body and flange of the light fitting are AlSi alloy castings finished with RAL 1005 powder paint. The optical cover is made of tempered glass. There are two cable outlets on the light fitting sides. There is electrical equipment and a reflector built inside the light fitting. The light fitting is designed as a through light fitting, for three-phase connection (five-core cable). When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

**Installation:**

With a suspension eye ø19 mm, ceiling holder 4-99.7995, flexible suspension 2-99.5550.

**To order:**



Type	Recommended light source [W]	Temperature class	T max. of surface [°C]	Voltage [V/Hz]	Weight [kg]
511 14 07 n	Halogen bulb Philips EcoClassic 140	T4	108	230 / 50	5
	Bulb CLAS 200	T4	104	230 / 50	5
	Blended lamp HWL 160	T4	99	230 / 50	5
	**High-pressure mercury discharge lamp HQL 80	T5	95	230 / 50	5
	***High-pressure mercury discharge lamp HQL 125	T4	121	230 / 50	5
	Compact fluorescent tube DULUX EL 23/18	T6	59	230 / 50	5
511 14 07 nt	Halogen bulb Philips EcoClassic 140	T4	118	230 / 50	5
	Bulb CLAS 200	T4	114	230 / 50	5
	Blended lamp HWL 160	T4	109	230 / 50	5
	**High-pressure mercury discharge lamp HQL 80	T4	105	230 / 50	5
	***High-pressure mercury discharge lamp HQL 125	T3	131	230 / 50	5
	Compact fluorescent tube DULUX EL 23/18	T6	69	230 / 50	5
511 14 07 nSt	Bulb (DC) 100	T4	100	24-230 DC	5
	Compact fluorescent tube DULUX EL FACILITY 18	T6	69	230 DC	5
511 14 07 nS	Bulb NARVA AGM 60	T5	90	110 DC	5
511 14 07 nF	Halogen bulb Philips EcoClassic 140	T4	108	230 / 50	5
	Bulb CLAS 200	T4	104	230 / 50	5
	Blended lamp HWL 160	T4	99	230 / 50	5
	**High-pressure mercury discharge lamp HQL 80	T5	95	230 / 50	5
	***High-pressure mercury discharge lamp HQL 125	T4	121	230 / 50	5
	Compact fluorescent tube DULUX EL 23/18	T6	59	230 / 50	5
511 14 07 nFt	Halogen bulb Philips EcoClassic 140	T4	118	230 / 50	5
	Bulb CLAS 200	T4	114	230 / 50	5
	Blended lamp HWL 160	T4	109	230 / 50	5
	**High-pressure mercury discharge lamp HQL 80	T4	105	230 / 50	5
	***High-pressure mercury discharge lamp HQL 125	T3	131	230 / 50	5
	Compact fluorescent tube DULUX EL 23/18	T6	59	230 / 50	5

\*By adding the letter „K“ behind type designation, light fittings will be provided with protective steel baskets (511 14 07 nK).

\*\*Light fitting provided with a mercury discharge lamp HQL 80W requires a ballast box type 604.6ntB.

\*\*\*Light fitting provided with a mercury discharge lamp HQL 125 W requires a ballast box type 604.6ntA.

\*\*\*\* Designation “ng” for three-phase connection (five-core cable) without screw terminal block.

# BILUX

**II 3G Ex nR IIC T4-T6 Gc**  **IP 65**  
**Zone 2/22 II 3D Ex tc IIIC Tmax. of surface Dc**

**Use:** Explosion-proof light fitting for the illumination of indoor and outdoor industrial spaces with the danger of gas, vapour and dust explosion.




**Technical description:**

The body and flange of the light fitting are AlSi alloy castings finished with RAL 1005 powder paint. The optical cover is made of hardened glass. There are two cable outlets on the light fitting sides. There is electrical equipment and a reflector built inside the light fitting. The light fitting is designed as a through light fitting, for two phase alternation (four-core cable). When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

**Installation:**

On the ceiling, wall or another solid substrate (structure) ensuring a firm connection.

**To order:**

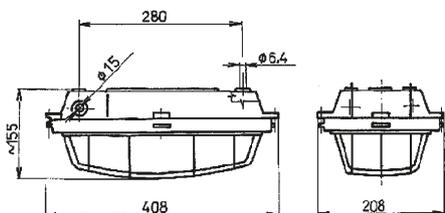

		IP65	-20°C ÷ +40°C version „n“ -20°C ÷ +50°C version „nt“
	E27 G23	24-230 V DC	Ta -20°C ÷ +40°C version „nSt“ -50°C ÷ +40°C version „nF“ -50°C ÷ +50°C version „nFt“
230V 50Hz	ATEX 2014/34/EU		Carton (mm/pcs): 410 x 460 x 170 / 2



Type	Recommended light source [W]	Temperature class	T max. of surface [°C]	Voltage [V/Hz]	Weight [kg]
511 32 01 n	Halogen bulb Philips EcoClassic 140	T4	108	230 / 50	4
	Bulb CLAS 200	T4	128	230 / 50	4
	Blended lamp HWL 160	T4	118	230 / 50	4
	**High-pressure mercury discharge lamp HQL 80	T5	83	230 / 50	4
	***High-pressure mercury discharge lamp HQL 125	T5	89	230 / 50	4
	Compact fluorescent tube DULUX EL 23	T6	58	230 / 50	4
511 32 01 nt	Halogen bulb Philips EcoClassic 140	T4	118	230 / 50	4
	Blended lamp HWL 160	T4	128	230 / 50	4
	**High-pressure mercury discharge lamp HQL 80	T5	93	230 / 50	4
	***High-pressure mercury discharge lamp HQL 125	T4	99	230 / 50	4
	Compact fluorescent tube DULUX EL 23	T6	68	230 / 50	4
511 32 01 nSt	Bulb (DC) 100	T4	108	24 – 230 DC	4
	Compact fluorescent tube DULUX EL FACILITY 18	T6	68	230 DC	4
511 32 01 nF	Halogen bulb Philips EcoClassic 140	T4	108	230 / 50	4
	Bulb CLAS 200	T4	128	230 / 50	4
511 32 01 nFt	Halogen bulb Philips EcoClassic 140	T4	118	230 / 50	4

\*\*Light fitting provided with a mercury discharge lamp HQL 80 W requires a ballast box type 604.6ntB.  
 \*\*\*Light fitting provided with a mercury discharge lamp HQL 125 W requires a ballast box type 604.6ntA.

# TRILUX

II 3G Ex nR IIC T4-T6 Gc **Ex** IP 65  
 Zone 2/22 II 3D Ex tc IIIC Tmax. of surface Dc

**Use:** Explosion-proof light fitting for the illumination of indoor and outdoor industrial spaces with a danger of gas, vapour and dust explosion.




**Technical description:**

The body and flange of the light fitting are AlSi alloy castings finished with RAL 1005 powder paint. The optical cover is made of hardened glass. There are two cable outlets on the light fitting sides. There is electrical equipment and a reflector built inside the light fitting. The light fitting is designed as a through light fitting, for three-phase connection (five-core cable). When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

**Installation:**

On the ceiling, wall or another solid substrate (structure) ensuring firm connection.

**To order:**

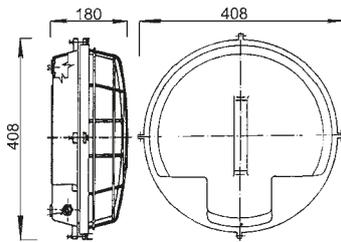

		IP65	<b>Ta</b> -20°C ÷ +40°C version „n“ -20°C ÷ +50°C version „nt“ -20°C ÷ +50°C version „nSt“ -20°C ÷ +70°C version „nHt“ -50°C ÷ +40°C version „nF“ -50°C ÷ +50°C version „nFt“
		24-230 V DC	
		Carton (mm/pcs): 400 x 400 x 190 / 1	



Type	Recommended light source [W]	Temperature class	T max. of surface [°C]	Voltage [V/Hz]	Weight [kg]
511 33 02 n	2 x halogen bulb Philips EcoClassic 70	T5	87	230 / 50	6
	2 x halogen bulb Philips EcoClassic 105	T4	101	230 / 50	6
	2 x bulb CLAS 150	T4	106	230 / 50	6
	1 x Blended lamp HWL 160	T5	89	230 / 50	6
	**1 x high-pressure mercury discharge lamp HQL 80	T6	68	230 / 50	6
	***1 x high-pressure mercury discharge lamp HQL 125	T6	79	230 / 50	6
	2 x compact fluorescent tube DULUX EL 23	T6	64	230 / 50	6
511 33 02 nt	2 x halogen bulb Philips EcoClassic 70	T5	97	230 / 50	6
	2 x halogen bulb Philips EcoClassic 105	T4	111	230 / 50	6
	2 x bulb CLAS 150	T4	116	230/50	6
	1 x blended lamp HWL 160	T5	99	230 / 50	6
	**1 x high-pressure mercury discharge lamp HQL 80	T6	78	230 / 50	6
	***1 x high-pressure mercury discharge lamp HQL 125	T5	89	230 / 50	6
	2 x compact fluorescent tube DULUX EL 23	T6	74	230 / 50	6
511 33 02 nSt	2 x bulb (DC) 100	T4	106	24 – 230 DC	6
	2 x compact fluorescent tube DULUX EL FACILITY 18	T6	74	230 DC	6
511 33 02 nHt	2 x halogen bulb Philips EcoClassic 70	T4	117	230 / 50	6
	2 x bulb CLAS 100	T4	122	230 / 50	6
511 33 02 nF	2 x halogen bulb Philips EcoClassic 70	T5	87	230 / 50	6
	2 x halogen bulb Philips EcoClassic 105	T4	101	230 / 50	6
	2 x bulb CLAS 150	T4	106	230 / 50	6
511 33 02 nFt	2 x halogen bulb Philips EcoClassic 70	T5	97	230 / 50	6
	2 x halogen bulb Philips EcoClassic 105	T4	111	230 / 50	6
	2 x bulb CLAS 150	T4	116	230 / 50	6

\*\*Light fitting provided with a mercury discharge lamp HQL 80 requires a ballast box type 604.6 ntB.

\*\*\*Light fitting provided with a mercury discharge lamp HQL 125W requires a ballast box type 604.6 ntA.

# SAFELUX/ MULTISAFE

**II 3G Ex nR II T6 Gc**  
**Zone 2/22 II 3D Ex tc IIIC T53°C Dc**

**Ex** IP 66

**Use:** Explosion-proof emergency light fitting for the permanent (M) or non-permanent (NM) illumination of indoor and outdoor industrial spaces with a danger of gas, vapour and dust explosion.

**Technical description:**

The body and flange of the light fitting are AlSi alloy castings finished with RAL 1005 powder paint. The optical cover is made of hardened glass. There are two cable outlets on the light fitting sides. There is an emergency module with a battery built inside the light fitting. The light fitting is designed as a through light fitting, for two phase alternation (four-core cable). When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.


**Installation:**

On the ceiling, wall or another solid substrate (structure) ensuring firm connection.

**Versions:**

Light fittings are made in versions for permanent (M) and non-permanent (NM) emergency illumination, with autonomy of 2 hours.

**To order:**

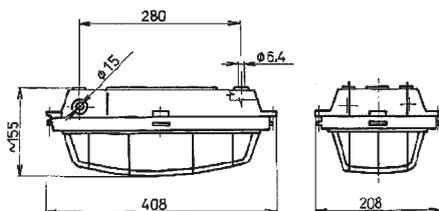

CE	EMERGENCY	⊕	IP66	ATEX 2014/34/EU
EVG	230 V 50 Hz	2G7	Ta 0°C ÷ +40°C	
Carton (mm/pcs): 430 x 240 x 180 / 1				



Protective basket  
1-99.5992/1



Protective glass  
132.5069



Screw plug  
V-Ex M20x1,5



Blinding plug  
HSK-V-Ex M20x1,5



Cable outlet  
HSK-K-Ex M20x1,5



Gland nut GM-FS  
M20x1,5 6,5-12mm

Name	Type	Recommended light source [W]	Temperature class	T max. of surface [°]	Version	Autonomy [hrs]	Weight [kg]
SAFELUX	581 32 01 nEM	Compact fluorescent tube DULUX S 9	T6	53	NM	2	4,6
MULTISAFE			T6	53	M / NM	2	4,9

# LINEX

**II 3G Ex nA IIC T4-T5 Gc**  
**Zone 2/22 II 3D Ex tc IIIB T max. of surface Dc**

**Ex** IP 55

**Use:** Explosion-proof light fitting for the illumination of indoor and outdoor industrial spaces with a danger of gas, vapour and dust explosion.

**Technical description:**

The body is made of steel sheet finished with RAL 1005 powder paint or stainless steel. The optical cover is made of polycarbonate. The optical cover is fixed by 10 stainless steel caps. Electrical equipment is formed on steel sheet finished by powder paint. There are two cable outlets M20x1.5 on the light fitting sides. The light fitting is made as a through light fitting, for a three-phase connection (five-core cable). The max. cross-section of the connecting conductors is 2.5 mm<sup>2</sup>.

**Installation:**

On the ceiling, wall, supporting structure or by suspension.


**Versions:**

The light fittings are made in versions with an electronic ballast (EVG) and with an emergency unit (EMERGENCY).

**To order:**

Protective polycarbonate cover 142.5511/2,

stainless steel cap 4-99.6188/01.

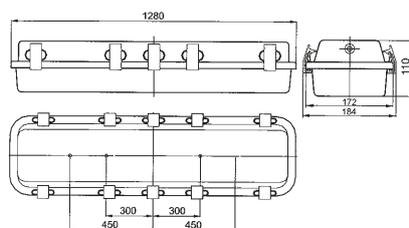

CE	EMERGENCY	⊕	IP55	230V 50Hz
EVG	ATEX 2014/34/EU	198-264 V AC 220-240 V DC	Ø 26 6 13	
Ta	EVG -20°C ÷ +40°C -30°C ÷ +60°C (K)	Carton (mm/pcs): 430 x 240 x 180 / 1		




Type - steel	Recommended light source [W]	Version	Socket	Weight [kg]
531 43 01	1 x linear fluorescent tube T8 36	EVG	G13	6,5
531 43 02	2 x linear fluorescent tube T8 36	EVG	G13	6
531 43 01 EM	1 x linear fluorescent tube T8 36	EMERGENCY	G13	7,5

Type - stainless steel	Recommended light source [W]	Version	Socket	Weight [kg]
531 43 05	1 x linear fluorescent tube T8 36	EVG	G13	6,5
531 43 06	2 x linear fluorescent tube T8 36	EVG	G13	6
531 43 05 EM	1 x linear fluorescent tube T8 36	EMERGENCY	G13	7,5

\*By adding the letter „K“ after the type designation, the light fittings will be provided with steel or stainless-steel protective baskets ( 531 43 01 K).

# ZONEX

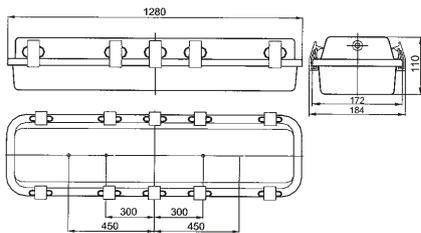

CE	EMERGENCY	IP65	ATEX 2014/34/EU
EVG	Ø 26 G13	110-254V AC 220-250V DC	Ta -30°C ÷ +50°C
Carton (mm/pcs): 1290 x 190 x 120 / 1			

## Zone 1/21 II 2G Ex eb mb IIC T4 Gb **Ex** IP 65 Zone 2/22 II 2D Ex tb IIIC Tmax. of surface Db

**Use:** Explosion-proof light fitting for the illumination of indoor and outdoor industrial spaces with a danger of gas, vapour and dust explosion.

### Technical description:

The body is made of steel sheet finished with RAL 1005 powder paint or stainless steel. The optical cover is made of polycarbonate. The optical cover is fixed by ten stainless steel caps. Electrical equipment is formed on steel sheet finished by powder paint. There are two cable outlets M20x1.5 on the light fitting sides. The light fitting is made as a through light fitting, for a three-phase connection (five-core cable). The max. cross-section of the connecting conductors is 2.5 mm<sup>2</sup>.

### Installation:

On the ceiling, wall, supporting structure or by suspension.

### Versions:

The light fittings are made in versions with an electronic ballast (EVG), electronic adjustable ballast (EVG DIMM) and with an emergency unit (EMERGENCY). Type 531 42 02 EM is designed for emergency lighting with autonomy for 3 hours.

### To order:

Protective polycarbonate cover 142.5511/2,

stainless steel cap 4-99.6188/01.



Type - steel	Recommended light source [W]	Version	Socket	Weight [kg]
531 42 01	1 x linear fluorescent tube T8 36	EVG	G13	6
531 42 02	2 x linear fluorescent tube T8 36	EVG	G13	6,5
531 42 01 EM	1 x linear fluorescent tube T8 36	EMERGENCY	G13	6
531 42 02 EM	2 x linear fluorescent tube T8 36	EMERGENCY	G13	7

Type - stainless steel	Recommended light source [W]	Version	Socket	Weight [kg]
531 42 03	1 x linear fluorescent tube T8 36	EVG	G13	6
531 42 04	2 x linear fluorescent tube T8 36	EVG	G13	6,5
531 42 03 EM	1 x linear fluorescent tube T8 36	EMERGENCY	G13	6
531 42 04 EM	2 x linear fluorescent tube T8 36	EMERGENCY	G13	7

\*By adding the letter „K“ after the type designation, the light fittings will be provided with steel or stainless-steel protective baskets (531 42 01 K).

# BOX 2

**II 3G Ex nR IIC T3-T6 Gc**  **IP 65**  
**Zone 2/22 II 3D Ex tc IIIC Tmax. of surface Dc**

**Use:** Explosion-proof ballast box for the operation of non-explosive light fittings with a mercury discharge lamp such as SIMPLEX, BILUX, TRILUX installed in atmospheres with a danger of gas, vapour and dust explosion.

**Technical description:**

The body and cover are AlSi alloy castings finished with RAL 1005 powder paint. There are cable outlets on the sides of the body. Electrical equipment is installed inside. Ballast box is designed as a through light fitting, for a three-phase connection (five-core cable). When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

**Installation:** With a suspension eye  $\varnothing 25$  mm.

**To order:**




Screw plug  
V-Ms-VMQ-Ex PG16



Screw plug  
V-Ex PG16



Blinding plug  
HSK-V-Ex PG16

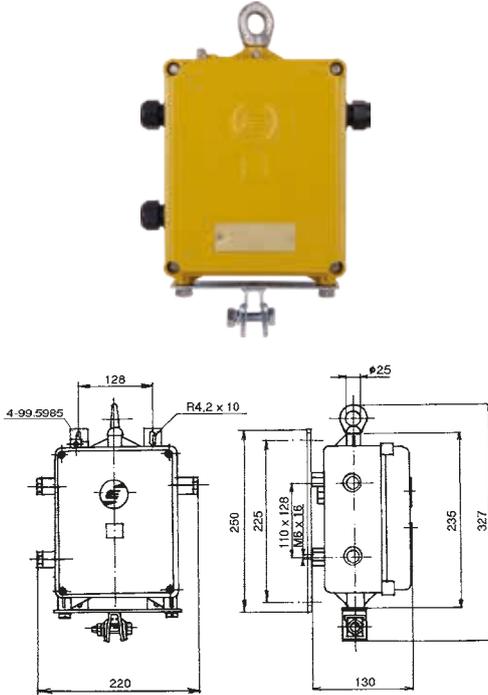

		IP65	ATEX 2014/34/EU
VVG	E27	Ta -20°C ÷ +50°C version „nt“ -40°C ÷ +50°C version „nFt“	
230V 50Hz	Carton (mm/pcs): 355 x 240 x 240 / 2		

Type	Recommended light source [W]	Temperature class	T max. of surface [°C]	Voltage [V/Hz]	Weight [kg]
604.6 ntA	High-pressure mercury discharge lamp HQL 125	T6	70	230 / 50	5
604.6 ntB	High-pressure mercury discharge lamp HQL 80	T6	70	230 / 50	5
604.6 nFtA	High-pressure mercury discharge lamp HQL 125	T6	70	230 / 50	5
604.6 nFtB	High-pressure mercury discharge lamp HQL 80	T6	70	230 / 50	5


**MINEX I**



# ZONEX LED IP 65 Zone 1/21 II 2G Ex eb mb IIC T4 Gb Zone 2/22 II 2D Ex tb mb IIIC Tmax. of surface Db



**COMING SOON**

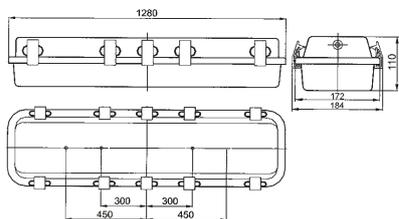

			IP65	ATEX 2014/34/EU
			Ta -30°C ÷ +50°C	
Carton (mm/pcs): 1290 x 190 x 120 / 1				

**Use:** Explosion-proof light fitting for the illumination of indoor and outdoor industrial spaces with a danger of gas, vapour and dust explosion.

**Technical description:**

The body is made of steel sheet finished with RAL 1005 powder paint or stainless steel. The optical cover is made of polycarbonate. The optical cover is fixed by ten stainless steel caps. Electrical equipment is formed on steel sheet finished by powder paint. There are two cable outlets M20x1.5 on the light fitting sides. The light fitting is made as a through light fitting, for a three-phase connection (five-core cable). The max. cross-section of the connecting conductors is 2.5 mm<sup>2</sup>.

**Installation:**

On the ceiling, wall, supporting structure or by suspension.

**Versions:**

The light fittings are made in versions with an electronic ballast (EVG), electronic adjustable ballast (EVG DIMM) and with an emergency unit (EMERGENCY).

**To order:**

Protective polycarbonate cover, stainless steel cap.

Type	Power input [W]	Luminous flux [lm]	Autonomy [hrs]	Luminous efficiency [lm/W]	Version
591 42 01	50	5000	-	100	steel
591 42 02	50	5000	-	100	stainless steel
591 42 01 EM	50	5000	3	100	steel
591 42 02 EM	50	5000	3	100	stainless steel

\*By adding letter „K“ behind type designation, light fittings will be provided with protective steel baskets (591 42 01 K).

# SIRIUS LED IP 65 Zone 1/21 II 2G Ex db eb op is IIC T4-T5 Gb Zone 2/22 II 2D Ex tb IIIC Tmax. of surface Db



**COMING SOON**

	230V 50Hz	ATEX 2014/34/EU
IP65		Ta -40°C ÷ +50°C
Carton (mm/pcs): 560 x 350 x 300 / 1		

**Use:** Explosion-proof light fitting for the illumination of indoor and outdoor industrial spaces with a danger of gas, vapour and dust explosion.

**Technical description:**

The body and flange of the light fitting are AlSi alloy castings finished with RAL 1005 powder paint. The optical cover is made of tempered glass. A steel suspension with eye is fixed to the top part of the body. There are two cable outlets on the sides of the light fitting. The steel base plate with electrical equipment and reflector is built inside the light fitting. The light fitting is designed as a through light fitting, for two phase alternation (four-core cable). When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

**Installation:** With steel suspensions with eyes ø18 mm.

**Versions:** Standard light fittings are available with cable outlets M25x1.5, optionally with cable outlets M20x1.5.

**To order:** Shade 154.5041/02, protective basket 1-99.5856, spanner 3-99.6159, blinding plug HSK-V-Ex M25x1.5, blinding plug HSK-V-Ex M20x1.5, screw plug V-Ex M25x1.5, screw plug V-Ex M20x1.5, screw plug V-Ms-VMQ-Ex M25x1.5, screw plug V-Ms-VMQ-Ex M20x1.5, spanner 3-99.6159.

Type	Power input [W]	Luminous flux [lm]	Colour temperature [K]	Voltage [V/Hz]	CRI
591 44 01	100	14000	4000	230/50	>80
591 44 02	80	11000	4000	230/50	>80
591 44 03	65	9000	4000	230/50	>80

\*By adding letter „K“ behind type designation, light fittings will be provided with protective steel baskets (591 44 01 K).

# HERKULES LED

**Zone 1/21 II 2G Ex db eb op is IIC T4-T5 Gb**  
**Zone 2/22 II 2D Ex tb IIIC Tmax. of surface Db**

**Ex** IP 65



**COMING SOON**



**Use:** Explosion-proof light fitting for the illumination of indoor and outdoor industrial spaces with a danger of gas, vapour and dust explosion.

**Technical description:**

The body and flange of the light fitting are AlSi alloy castings finished with RAL 1005 powder paint. The optical cover is made of tempered glass. A locking steel holder with eyes  $\varnothing 12.5$  mm is fixed to the body. There are two cable outlets on the light fitting sides. There is electrical equipment and a reflector built inside the light fitting. The light fitting is designed as a through light fitting, for three-phase connection (five-core cable). When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

**Installation:**

With a steel suspension with eyes  $\varnothing 12.5$  mm, using a wall holder 3-99.6183.

**To order:** Shade 154.5041/02, protective basket 1-99.5856, spanner 3-99.6159, blinding plug HSK-V-Ex M20x1.5, screw plug V-Ex M20x1.5, screw plug V-MS-VMQ-Ex M20x1.5.

CE	230V 50Hz		Carton (mm/pcs): 800 x 400 x 400 / 1
ATEX 2014/34/EU	IP65	Ta	-40°C ÷ +50°C

Type	Power input [W]	Luminous flux [lm]	Colour temperature [K]	Voltage [V/Hz]	CRI
591 45 01	200	27000	4000	230/50	>80
591 45 02	150	21000	4000	230/50	>80


\*By adding letter „K“ behind type designation, light fittings will be provided with protective steel baskets (591 45 01 K).

# LINEX LED

**Zone 2/22 II 3G Ex nR IIC T5-T6 Gc** **Ex** IP 65  
**II 3D Ex tc IIIC Tmax. of surface Dc**



**COMING SOON**

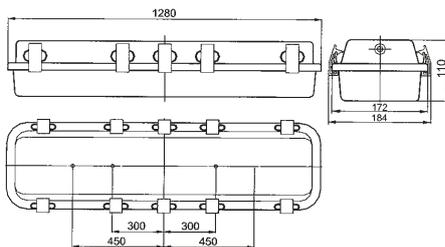

CE	EMERGENCY		IP65
ATEX 2014/34/EU	Ta	-30°C ÷ +50°C +5°C ÷ +50°C (EM)	
198-254V AC 220-240V DC	Carton (mm/pcs):	430 x 240 x 240 / 1	

**Use:** Explosion-proof light fitting for the illumination of indoor and outdoor industrial spaces with a danger of gas, vapour and dust explosion.

**Technical description:**

The body is made of steel sheet finished with RAL 1005 powder paint or stainless steel. The optical cover is made of polycarbonate. The optical cover is fixed by 10 stainless steel caps. Electrical equipment is formed on steel sheet finished by powder paint. There are two cable outlets M20x1.5 on the light fitting sides. The light fitting is made as a through light fitting, for a three-phase connection (five-core cable). The max. cross-section of the connecting conductors is 2.5 mm<sup>2</sup>.

**Installation:**

On the ceiling, wall, supporting structure or by suspension.

**Versions:**

The light fittings are made in versions with an electronic ballast (EVG) and with an emergency unit (EMERGENCY).

**To order:**

Protective polycarbonate cover 142.5511/2, stainless steel cap 4-99.6188/01.

Type - steel	Power input [W]	Luminous flux [lm]	Colour temperature [K]	CRI	Type - stainless steel	Power input [W]	Luminous flux [lm]	Colour temperature [K]	CRI
591 43 01	65	12500	4000	>80	591 43 05	65	12500	4000	>80
591 43 02	50	10000	4000	>80	591 43 06	50	10000	4000	>80
591 43 03	40	7750	4000	>80	591 43 07	40	7750	4000	>80
591 43 04	25	5000	4000	>80	591 43 08	20	5000	4000	>80



# Industrial light fittings

# PEGAS LED



CE	⊕	IP65	180-264V AC
LED	EVG	EVG DIMM	Ta -35°C ÷ +45°C
Carton (mm/pcs): 410 x 240 x 240 / 1 430 x 240 x 240 / 1 K			

**Use:** Light fitting for the illumination of heavy indoor and outdoor industrial spaces with a high level of mechanical stress

**Technical description:** The light fitting body and flange are AlSi alloy castings finished with powder paint. The optical cover is made of tempered glass. A steel suspension with an eye is fixed to the top part of the body. There are two cable outlets on the light fitting sides. There is an LED module built inside the light fitting and it is comprised of a board fitted with LEDs and a power supply. The light fitting is designed as a through light fitting, for three-phase connection (five-core cable). When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

**Installation:** With a steel suspension with an eye ø18 mm.

**Versions:** The light fittings are made in a version with an electronic adjustable ballast (EVG DIMM) which enables the adjusting of the luminous flux and thus the light fitting power inlet to 50%. Light fittings are provided with a self-resetting thermal fuse and surge guard up to 3,75 kV. Standard light fittings are available with cable outlets M25x1.5, optionally with cable outlets M20x1.5.

**To order:**



Shade  
254.5021/01



Spanner  
3-99.6158/1



Holder for mounting  
on the ceiling  
4-99.7995



Holder for mounting  
on the wall  
338.2735

Type	Power input [W] / Luminous flux [lm]	Luminous efficiency [lm/W]	Angle of beam [°]	Colour temperature [K]	CRI	Weight [kg]
591 41 01 (K)	45 / 6000	133	120	4000	>80	10

\*By adding the letter „K“ after type designation, light fittings will be provided with protective steel baskets (591 41 01 K).

# JUNIOR LED



CE	⊕	IP66	198-264V AC 170-267V DC
LED	EVG	EVG DIMM	Ta -40°C ÷ +50°C
Carton (mm/pcs): 355 x 240 x 240 / 1			

**Use:** Light fitting for the illumination of heavy indoor and outdoor industrial spaces with a high level of mechanical stress.

**Technical description:**

The light fitting body and flange are AlSi alloy castings finished with powder paint. The optical cover is made of tempered glass. There are two cable outlets on the light fitting sides. There is an LED module built inside the light fitting and it is comprised of a board fitted with LEDs and a power supply. The light fitting is designed as a through light fitting, for three-phase connection (five-core cable). When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

**Installation:** With a suspension eye ø19 mm, ceiling holder 4-99.7995, flexible suspension 2-99.5550.

**Versions:** Light fittings are made in a version with an electronic adjustable ballast (EVG DIMM) which enables the adjusting of the luminous flux and thus the light fitting power inlet to 50%. Light fittings are provided with a self-resetting thermal fuse and surge guard up to 3 kV.

**To order:**



Shade  
254.5021/01



Flexible suspension  
2-99.5550



Holder for mounting  
on the ceiling  
4-99.7995

Type	Power input [W] / Luminous flux [lm]	Luminous efficiency [lm/W]	Angle of beam [°]	Colour temperature [K]	CRI	Weight [kg]
591 15 01 (K)	30 / 3880	129	120	4000	>80	6

\*By adding the letter „K“ behind type designation, light fittings will be provided with protective steel basket (591 15 01 K).

# FARMER I LED



591 36 01



591 36 02



593 36 04



592 36 03

CE	⏚	IP54	198-264V AC 170-267V DC
LED	EVG	EVG DIMM	Ta -35°C ÷ +40°C
IP65 591 36 02	Carton (mm/pcs): 1000 x 280 x 280 / 2 650 x 280 x 280 / 2		

**Use:** Light fitting for the illumination of indoor and outdoor industrial spaces.

**Technical description:** The body is made of steel sheet and finished with powder paint. The inorganic glass cover with seal and protective basket are fixed to the body with four metal caps. There is an LED module built inside the light fitting and it is comprised of a board fitted with LEDs and a power supply. According to the individual types, the light fitting includes: an AISi terminal box, a steel pipe finished with powder paint or a galvanized steel sheet boom. The light fitting is made as a through light fitting and is provided with two cable outlets. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

**Installation:** On the ceiling, wall.

**Versions:** Optional version of light fittings with reinforced corrosion protection – version „pz“, version with a protective steel basket – version „K“, version with a protective polycarbonate basket and stainless-steel caps – version „p“. Light fittings are made in a version with an electronic adjustable ballast (EVG DIMM) which enables the adjusting of the luminous flux and thus the light fitting power inlet to 50%. Light fittings are provided with a self-resetting thermal fuse and surge guard up to 3 kV.

**To order:**



Glass cover  
232.5068/1



Protective basket  
182.5005 - PMMA  
132.2540 - polycarb.




Protective steel  
basket 1-99.6231



Metal cap  
4-99.8470/01



Stainless metal  
cap 4-99.6180/01

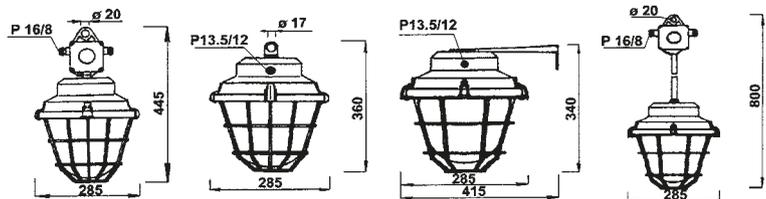

Power input [W] / Luminous flux [lm]	Luminous efficiency [lm/W]	Angle of beam [°]	Colour temperature [K]	CRI
30 / 3880	129	120	4000	>80

Type	Light source [W]	Part of light fitting	Weight [kg]
591 36 01 (K)	LED 30	Terminal box	4,8
591 36 02 (K)		Holder	4,8
592 36 03 (K)		Pipe and terminal box	4,8
593 36 04 (K)		Boom	4,8

\*By adding the letter „K“ after the type designation, the light fittings will be provided with protective baskets (591 36 01K).

\*\*By adding the letter „p“ after the type designation, the light fittings will be made with protective polycarbonate baskets and stainless-steel caps – for harsh conditions (591 36 01p).

\*\*By adding the letters „pz“ after the type designation, the light fittings will be made with reinforced corrosion protection – for extra harsh conditions (591 36 01Kpz).

# FARMER II LED



591 37 01



592 37 03



593 37 04

**Use:** Light fitting for the illumination of indoor and outdoor industrial spaces.

**Technical description:**



The body is made of steel sheet and finished with powder paint. The inorganic glass cover with a seal and protective basket is fixed to the body with four metal caps. There is an LED module built inside the light fitting and it is comprised of a board fitted with LEDs and a power supply. According to the individual types, the light fitting includes: an AISi terminal box, a steel pipe finished with powder paint or a galvanized steel sheet boom. The light fitting is made as a through light fitting and is provided with two cable outlets. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

**Installation:**  
On the ceiling, wall.

**Versions:**

Optional version of light fittings with reinforced corrosion protection – version „pz“, version with a protective steel basket – version „K“, version with a protective polycarbonate basket and stainless-steel caps – version „p“. The light fittings are

CE	⊕	IP54	198-264V AC 170-267V DC
LED	EVG	EVG DIMM	Ta -35°C ÷ +35°C
Carton (mm/pcs): 1000 x 280 x 280 / 1 650 x 280 x 280 / 1			

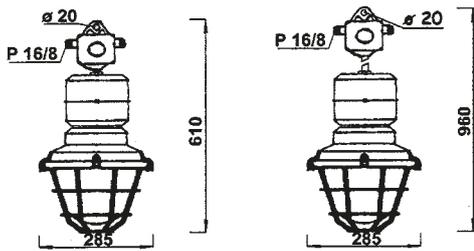

made in a version with an electronic adjustable ballast (EVG DIMM) which enables the adjusting of the luminous flux and thus the light fitting power inlet to 50%. The light fittings are provided with a self-resetting thermal fuse and a surge guard up to 3 kV.

To order:



Glass cover  
232.5068/1



Protective basket  
182.5005 - PMMA  
132.2540 - polycarb.



Protective steel  
basket 1-99.6231



Metal cap  
4-99.8470/01



Stainless metal  
cap 4-99.6180/01

Power input [W] / Luminous flux [lm]	Luminous efficiency [lm/W]	Angle of beam [°]	Colour temperature [K]	CRI
45 / 6000	133	120	4000	>80

Type	Light source [W]	Part of light fitting (on photo)	Weight [kg]
591 37 01 (K)	LED 45	Terminal box	8
592 37 03 (K)		Pipe + terminal box	8
593 37 04 (K)		Boom	8

\*By adding the letter „K“ after the type designation, the light fittings will be provided with protective baskets (591 37 01K).


\*\*By adding the letter „p“ after the type designation, the light fittings will be made with protective polycarbonate baskets and stainless-steel caps – for harsh conditions (591 37 01p).

\*\*\*By adding the letters „pz“ after the type designation, the light fittings will be made with reinforced corrosion protection – for extra harsh conditions (591 37 01Kpz).

## TUB LED



CE	⊕	IP66	F	LED
EVG	EVG DIMM	EMERGENCY	220-240 V AC	
Ta	-35°C ÷ +40°C -25°C ÷ +40°C version „EM“ -35°C ÷ +50°C version „t“			
Carton (mm/pcs): 410 x 460 x 170 / 2				

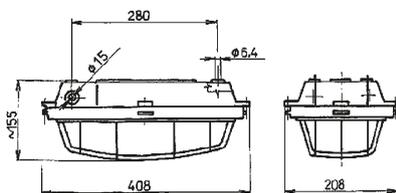

Use: Light fitting for the illumination of indoor and outdoor industrial spaces.

**Technical description:** The body is made of steel sheet and finished with powder paint. The inorganic glass cover with a seal and protective basket is fixed to the body with four metal caps. There is an LED module built inside the light fitting and it is comprised of a board fitted with LEDs and a power supply. According to the individual types, the light fitting includes: an AlSi terminal box, a steel pipe finished with powder paint or a galvanized steel sheet boom. The light fitting is made as a through light fitting and is provided with two cable outlets. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

**Installation:** On the ceiling, wall.

**Versions:** Optional version of light fittings with reinforced corrosion protection – version „pz“, version with a protective steel basket – version „K“, version with a protective polycarbonate basket and stainless-steel caps – version „p“. The light fittings are made in a version with an electronic adjustable ballast (EVG DIMM) which enables the adjusting of the luminous flux and thus the light fitting power inlet. The light fittings are provided with a self-resetting thermal fuse and a surge guard up to 3 kV.

To order:



Protective basket  
1-99.8535/1




Glass cover  
132.5069

Type	Power input [W] / Luminous flux [lm]	Luminous efficiency [lm/W]	Angle of beam [°]	Colour temperature [K]	CRI	Weight [kg]
591 34 01	35 / 3550	101	120	4000	>80	6
591 34 01 t	25 / 2600	104	120	4000	>80	6

Type	Power input [W] / Luminous flux [lm]	Light source [W]	Version	Autonomy [hrs]	Weight [kg]
591 34 01 EM	10 / 380	3 x LED	M / NM	3	4,9
591 34 02 EM	17 / 1150	10 x LED	M / NM	3	4,9

# TURTLE LED

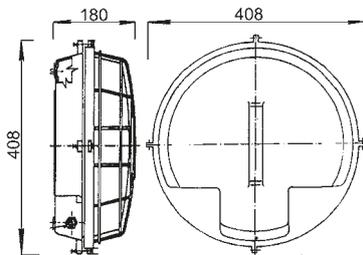

**Use:** Light fitting for the illumination of indoor and outdoor industrial spaces.

**Technical description:** The light fitting body and flange are AlSi alloy castings finished with powder paint. There are two cable outlets on the sides of the light fitting. There is an LED module built inside the light fitting and it is comprised of a board fitted with LEDs and a power supply. The light fitting is designed as a through light fitting. When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 2.5 mm<sup>2</sup>.

**Installation:** On the ceiling, wall or another solid substrate (structure) ensuring firm connection.

**Versions:** Light fittings are made in a version with an electronic adjustable ballast (EVG DIMM) which enables the adjusting of the luminous flux and thus the light fitting power input to 50%. The light fittings are provided with a self-resetting thermal fuse and a surge guard up to 3 kV.

**To order:**



Protective basket  
1-99.8534/1



Glass cover  
232.5070



Blinding plug  
PG11/M16

CE	⊕	IP66	Ta -35°C ÷ +40°C
LED	EVG	EVG DIMM	220-240 V AC
F	Carton (mm/pcs): 400 x 400 x 190 / 1		

Type	Power input [W] / Luminous flux [lm]	Luminous efficiency [lm/W]	Angle of beam [°]	Colour temperature [K]	CRI	Weight [kg]
591 35 01	50 / 6000	120	120	4000	>80	6

# ES STP LED



CE	⊕	IP65	LED	230V 50Hz
Carton (mm/pcs): 250 x 350 x 203 / 1				

**Use:** Light fitting for the illumination of industrial spaces such as halls, warehouses, workshops, particularly areas where the energy efficiency and long life of the light source

**Technical description:**

The light fitting body is aluminium casting finished with powder paint. The optical cover is made of hardened glass. There is an LED module built inside the light fitting and it is comprised of a board fitted with LEDs and a power supply. The max. cross-section of the connecting conductors is 2.5 mm<sup>2</sup>.

**Installation:**

With a suspension eye, mounting on ceiling, wall or construction via an adjustable console.

**To order:**



Shade



Lockable positional  
holder



Ceiling holder

Type	Power input [W] / Luminous flux [lm]	CRI	Colour temperature [K]	Dimensions [mm]
ES STP LED-100	100 / 13 000	>80	4000	Ø280x200
ES STP LED-150	150 / 19 500	>80	4000	Ø280x200
ES STP LED-200	200 / 26 000	>80	4000	Ø280x228

# PRACHO LED

**Use:** Light fitting for the illumination of indoor and outdoor moist, dusty industrial spaces such as halls, warehouses, workshops, corridors, cellars, particularly environments with an increased occurrence of aggressive chemicals.

**Technical description:**

The body is made of steel sheet finished with powder paint or stainless steel. The optical cover is made of polycarbonate. Electrical equipment is formed by LED module with a regulated power supply. The light fitting is made as a through light fitting and is provided with five-pin terminal block. The max. cross-section of the connecting conductors is 2.5 mm<sup>2</sup>.


**Installation:**

By hanging, on the ceiling, wall or boom.

**Versions:**

Electronic ballast (EVG), electronic adjustable ballast (EVG DIMM), emergency unit (EM, with autonomy of 3 hours).

**To order:**

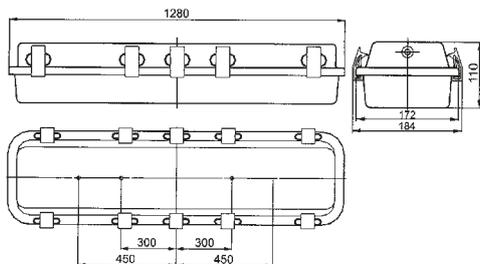

Polycarbonate cover  
142.5511/2  
1-99.9617PC



Plastic cap  
4-99.10213/1



Stainless steel cap  
4-99.6188/1

CE	⏚	IP65	EMERGENCY
LED	EVG	EVG DIMM	Carton (mm/pcs): 1290 x 190 x 120 / 1
<b>Ta</b> -25°C ÷ +40°C (591 31 01, 06) -25°C ÷ +45°C (591 31 02, 03, 07, 08) -25°C ÷ +50°C (591 31 04, 09)		120-277V AC 175-265V DC 220-240V AC 50/60Hz	

Type - steel	Power input [W] / Luminous flux [lm]	Luminous efficiency [W/lm]	Colour temperature [K]	CRI	Dimensions A x B x C [mm]	Weight [kg]
591 31 01	65 / 12500	192	4000	>80	1280 x 184 x 110	6
591 31 02	50 / 10000	200	4000	>80	1280 x 184 x 110	6
591 31 03	40 / 7750	194	4000	>80	1280 x 184 x 110	6
591 31 04	25 / 5000	200	4000	>80	1280 x 184 x 110	6

Type - stainless steel	Power input [W] / Luminous flux [lm]	Luminous efficiency [W/lm]	Colour temperature [K]	CRI	Dimensions A x B x C [mm]	Weight [kg]
591 31 06	65 / 12500	192	4000	>80	1280 x 184 x 110	6
591 31 07	50 / 10000	200	4000	>80	1280 x 184 x 110	6
591 31 08	40 / 7750	194	4000	>80	1280 x 184 x 110	6
591 31 09	25 / 5000	200	4000	>80	1280 x 184 x 110	6

\*By adding the letter „K“ after the type designation, the light fittings will be provided with steel or stainless-steel protective basket (591 31 01K).

# FARMER I



511 29 02



511 29 01  
581 29 01



513 04 01  
583 04 01



512 04 01  
582 04 01

CE	⊕	IP54	E27	D
IP65 pro 511 29 02	G24d-3	Ta -25°C ÷ +40°C -40°C ÷ +60°C version „IF”		
VVG	Carton (mm/pcs):	1000 x 280 x 280 / 2	650 x 280 x 280 / 2	

**Use:** Light fitting for the illumination of indoor and outdoor industrial spaces.

## Technical description:

The body is made of steel sheet and finished with powder paint. The inorganic glass cover with a seal and protective basket are fixed to the body with four metal caps. According to individual types, the light fitting includes: an ALSi terminal box, a steel pipe finished with powder paint or a galvanized steel sheet boom. The light fitting is made as a through light fitting and is provided with two cable outlets. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

## Installation:

On the ceiling, wall.

## Versions:

Optional version of light fittings with reinforced corrosion protection – version „pz”, version with a protective steel basket – version „K”, version with a protective polycarbonate basket and stainless-steel caps – version „p”.

## To order:



Glass cover  
232.5068/1



Protective basket  
182.5005 - PMMA  
132.2540 - polycarb.




Protective steel  
basket 1-99.6248



Metal cap  
4-99.8470/01



Staninless metal  
cap 4-99.6180/01

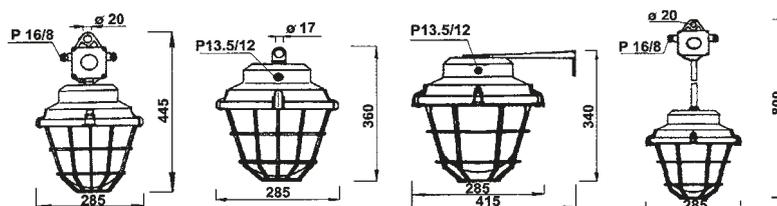

Type	Recommended light source [W]	Part of light fitting	Weight [kg]
511 29 01 (tF)	Bulb CLAS max. 200 **Halogen bulb EcoClassic max. 140 **Blended lamp HWL 160	Terminal box	4,2
511 29 02 (tF)		Holder	4,2
512 04 01 (tF)		Pipe and terminal box	4,2
513 04 01 (tF)		Boom	4,2
581 29 01	Compact fluorescent tube DULUX D 26	Terminal box	5,1
582 04 01		Pipe and terminal box	5,1
583 04 01		Boom	5,1

\*By adding the letter „K” after the type designation, the light fittings will be provided with protective baskets (511 29 01K).

\*\* Types with limited surface temperature.

\*\*\*By adding the letter „p” after the type designation, the light fittings will be made with protective polycarbonate baskets and stainless-steel caps – for harsh conditions (511 29 01p).

\*\*\*\*By adding the letters „pz” after the type designation, the light fittings will be made with reinforced corrosion protection – for extra harsh conditions (511 29 01pz).

**Any combinations of special versions at the customer’s request.**

# FARMER II

**Use:** Light fitting for the illumination of indoor and outdoor industrial spaces.

## Technical description:

The body is made of steel sheet and finished with powder paint. The inorganic glass cover with a seal and a protective basket is fixed to the body with four metal caps. According to the individual types, the light fitting includes: an AISi terminal box, a steel pipe finished with powder paint or a galvanized steel sheet boom. The light fitting is made as a through light fitting and is provided with two cable outlets. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

## Installation:

On the ceiling, wall.

## Versions:

Optional version of light fittings with reinforced corrosion protection – version „pz“, version with a protective steel basket – version „K“, version with a protective polycarbonate basket and stainless-steel caps – version „p“, version with an electronic ballast (EVG) - version „EP“.

## To order:



Glass cover  
232.5068/1



Protective basket  
182.5005 - PMMA  
132.2540 - polycarb.



Protective steel  
basket 1-99.6248




Metal cap  
4-99.8470/01



Stainless metal  
cap 4-99.6180/01

CE	⊕	EVG	VVG	IP54
E27	230V 50Hz	Ta -25°C ÷ +40°C		
<b>Carton (mm/pcs):</b> 1000 x 280 x 280 / 1 650 x 280 x 280 / 1 860 x 440 x 280 / 2				

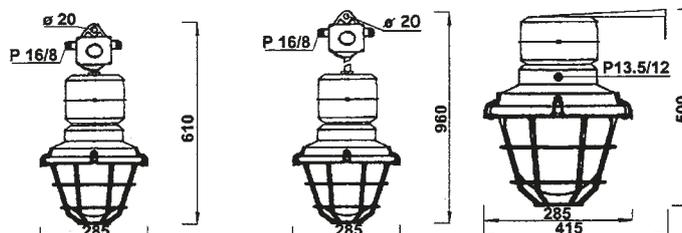

Type	Recommended light source [W]	Part of light fitting	Weight [kg]
541 17 01	High-pressure mercury discharge lamp 125	Terminal box	7,1
541 24 01	High-pressure sodium discharge lamp 70	Terminal box	7,3
	High-pressure halide discharge lamp 70	Terminal box	7,3
541 24 01 EP	High-pressure halide discharge lamp 70	Terminal box	7
542 02 01	High-pressure mercury discharge lamp 125	Pipe and terminal box	7,1
542 07 01	High-pressure sodium discharge lamp 70	Pipe and terminal box	7,3
	High-pressure halide discharge lamp 70	Pipe and terminal box	7,3
543 01 01	High-pressure mercury discharge lamp 125	Boom	7,1
543 05 01	High-pressure sodium discharge lamp 70	Boom	7,3


\*By adding the letter „K“ after the type designation, the light fittings will be provided with protective baskets (541 17 01K).

\*\*By adding the letter „p“ after the type designation, the light fittings will be made with protective polycarbonate baskets and stainless-steel caps – for the harsh conditions (541 17 01p).

\*\*By adding the letters „pz“ after the type designation, the light fittings will be made with reinforced corrosion protection – for extra harsh conditions (541 17 01pz).

Any combinations of special versions at the customer's request.

# FARMER III

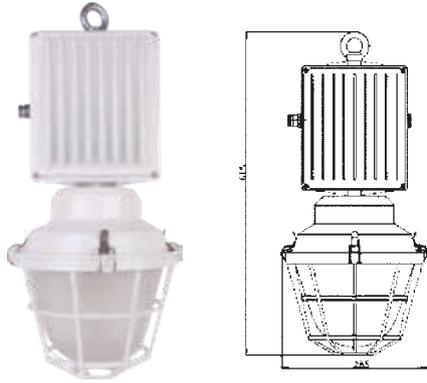

**Use:** Light fitting for the illumination of indoor and outdoor industrial spaces. The light fitting is uncompensated.

**Technical description:**

The light fitting consists of a ballast box – an AlSi alloy casting and a body made of steel sheet, finished with powder paint. The inorganic glass cover with a seal and protective polycarbonate basket is fixed to the body with four stainless steel caps. The max. cross-section of connecting conductors is 4 mm<sup>2</sup>.

**Installation:**

On the ceiling, with a suspension eye  $\varnothing 30$  mm.

**Versions:**

Version with a protective steel basket – version „K“.

**To order:**



Glass cover  
232.5068/1

Protective basket  
182.5005 - PMMA  
132.2540 - polycarb.

Protective steel  
basket 1-99.6248

Stainless metal  
cap 4-99.6180/01

CE	⊕	IP54	E27
<b>Ta</b> -25°C ÷ +55°C (t) -40°C ÷ +40°C (F)		<b>VVG</b> 	<b>230V</b> <b>50Hz</b>
<b>Carton (mm/pcs):</b> 650 x 280 x 290 / 1			

Type	Recommended light source [W]	Weight[kg]
<b>54118 01 t</b>	High-pressure mercury discharge lamp HQL 125	7,1
<b>54118 02 t</b>	High-pressure sodium/halide discharge lamp 70	7,1
<b>54118 03 F</b>	Halogen lamp HCI-E 150	7,5
<b>54118 04 F</b>	Halogen lamp HQL-E 100	7,5

\*By adding the letter „K“ after the type designation, the light fittings will be provided with protective baskets (54118 01Kt).

# JUNIOR



**Use:** Light fitting for the illumination of heavy indoor and outdoor industrial spaces with a high level of mechanical stress.

**Technical description:**

The light fitting body and flange are AlSi alloy castings finished with powder paint. The optical cover is made of tempered glass. There are two cable outlets on the light fitting sides. There is electrical equipment and a reflector built inside the light fitting. The light fitting is designed as a through light fitting, for three-phase connection (five-core cable). When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

**Installation:**

With a suspension eye  $\varnothing 19$  mm, ceiling holder 4-99.7995, flexible suspension 2-99.5550.

**To order:**

CE	⊕	IP66	230V 50Hz
E27	VVG	<b>Ta</b> -40°C ÷ +50°C (t)	
<b>Carton</b> 410 x 240 x 240 / 1 <b>(mm/pcs):</b> 430 x 240 x 240 / 1 K			



Shade  
254.5021/01

Protective basket  
2-99.6195

Flexible suspension  
2-99.5550

Protective glass  
332.5018

Ceiling holder  
4-99.7995

Type	Recommended light source [W]	Voltage [V/Hz]	Weight [kg]
<b>51114 07</b>	Halogen bulb Philips EcoClassic 140	230/50	5
	Bulb CLAS 200	230/50	5
	Blended lamp HWL 160	230/50	5
	**High-pressure mercury discharge lamp HQL 180	230/50	5
	***High-pressure mercury discharge lamp HQL 125	230/50	5

\*By adding the letter „K“ after the type designation, the light fittings will be provided with protective steel baskets (51114 07K).

\*\*Light fitting provided with a mercury discharge lamp HQL 80W requires a ballast box type BOX 2.

\*\*\*Light fitting provided with a mercury discharge lamp HQL 125W requires a ballast box type BOX 2.

# PEGAS



CE		IP65	230V 50Hz
E27	VVG	Ta -40°C ÷ +50°C (t)	
Carton	410 x 240 x 240 / 1		
(mm/pcs):	430 x 240 x 240 / 1 K		

**Use:** Light fitting for the illumination of heavy indoor and outdoor industrial spaces with a high level of mechanical stress.

**Technical description:**

The light fitting body and flange are ALSi alloy castings finished with powder paint. The optical cover is made of tempered glass. A steel suspension with an eye is fixed to the top part of the body. There are two cable outlets on the sides of the light fitting. The steel base plate with electrical equipment and reflector is built inside the light fitting. The light fitting is designed as a through light fitting, for three-phase connection (five-core cable). When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

**Installation:**

With a steel suspension with an eye ø18 mm.

**Versions:**

Standard light fittings are available with cable outlets M25x1.5, optionally with cable outlets M20x1.5.


**To order:**



Type	Recommended light source [W]	Voltage [V/Hz]	Weight [kg]
511 41 01	Halogen bulb Philips EcoClassic 140	230/50	8,5
	Halogen bulb Philips EcoClassic 105	230/50	8,5
	Halogen bulb Philips EcoClassic 70	230/50	8,5
	Bulb CLAS 200	230/50	8,5
	Bulb CLAS 150	230/50	8,5
	Bulb CLAS 60-100	230/50	8,5
	Blended lamp HWL 160	230/50	8,5
541 41 01	High-pressure mercury discharge lamp HQL 80	230/50	8,5
	High-pressure sodium discharge lamp NAV-E 50/I	230/50	9
541 41 02	High-pressure mercury discharge lamp HQL 125	230/50	9
	High-pressure sodium discharge lamp NAV-E 110/I	230/50	9
541 41 03	High-pressure halide lamp HQI 70	230/50	9

\*By adding the letter „K“ after the type designation, the light fittings will be provided with protective baskets (511 41 01K).

# TUB

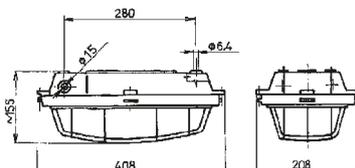

**Use:** Light fitting for the illumination of indoor and outdoor industrial spaces.

**Technical description:**

The light fitting body and flange are ALSi alloy castings finished with powder paint. The optical cover is made of hardened glass. There are two cable outlets on the light fitting sides. There is electrical equipment and a reflector built inside the light fitting. The light fitting is designed as a through light fitting. When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 2.5 mm<sup>2</sup>.

**Installation:**

On the ceiling, wall or another solid substrate (structure) ensuring firm connection.

**Versions:**

The emergency light fitting design, type 511 32 01EM, is made in versions for permanent (M) and non-permanent (NM) emergency illumination, with autonomy

CE		IP66	EMERGENCY 
E27	230V 50Hz		G23 24V DC
<b>Ta</b> -25°C ÷ +40°C 0°C ÷ +40°C version „EM“ -40°C ÷ +60°C version „tF“		<b>Carton (mm/pcs):</b> 410 x 460 x 170 / 1	

To order:



Protective basket  
1-99.8535/1



Protective glass  
132.5069



Blinding plug  
PG11/M16



Ballast box  
BOX 2

Type	Recommended light source [W]	Voltage [V/Hz]	Weight [kg]
511 32 01	Halogen bulb Philips EcoClassic 140	230 / 50	4
	Bulb CLAS 200	230 / 50	4
	Blended lamp HWL 160	230 / 50	4
	*High-pressure mercury discharge lamp HQL 80	230 / 50	4
	*High-pressure mercury discharge lamp HQL 125	230 / 50	4
	Compact fluorescent tube DULUX EL 23	230 / 50	4
511 32 24	Bulb for 24 V DC, 100	24 V DC	4
581 01 01	1 x Compact fluorescent tube DULUX S 9/11	230 / 50	4
581 01 02	2 x compact fluorescent tube DULUX S 9/11	230 / 50	4
511 32 01 EM	Compact fluorescent tube DULUX S 9	230 / 50	5
511 32 01 tF	Halogen bulb Philips EcoClassic 140	230 / 50	4
	Bulb CLAS 200	230 / 50	4
	Blended lamp HWL 160	230 / 50	4

\* Light fitting provided with a mercury discharge lamp HQL requires a ballast box type BOX 2.

# TURTLE



CE	IP66	
	E27	230V 50Hz
<b>Ta</b> -25°C ÷ +40°C -50°C ÷ +80°C version „Ht“		
<b>Carton (mm/pcs):</b> 400 x 400 x 190 / 1		

**Use:** Light fitting for the illumination of indoor and outdoor industrial spaces.

### Technical description:

The light fitting body and flange are AlSi alloy castings finished with powder paint. The optical cover is made of hardened glass. There are two cable outlets on the light fitting sides. Electrical equipment is installed inside the light fitting. The light fitting is designed as a through light fitting. When the light fitting is used as a terminal light fitting, the free cable outlet is blinded with a plug. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

### Installation:

On the ceiling, wall or another solid substrate (structure) ensuring firm connection.

To order:



Protective basket  
1-99.8534 / 1




Protective glass  
232.5070



Blinding plug PG11/  
M16




Ballast box  
BOX 2

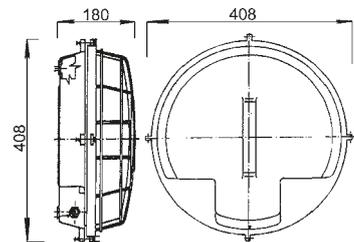

Type	Recommended light source [W]	Voltage [V/Hz]	Weight [kg]
511 33 02	2 x halogen bulb Philips EcoClassic 105	230 / 50	6
	2 x bulb CLAS 200	230 / 50	6
	1 x blended lamp HWL 160	230 / 50	6
	*1 x high-pressure mercury discharge lamp HQL 80	230 / 50	6
	*1 x high-pressure mercury discharge lamp HQL 125	230 / 50	6
	2 x compact fluorescent tube DULUX EL 23	230 / 50	6
511 33 02 Ht	2 x halogen bulb Philips EcoClassic 70	24 V DC	6
	2 x bulb CLAS 100	230 / 50	6

\* Light fitting provided with a mercury discharge lamp HQL requires a ballast box type BOX 2.

# PRACHO

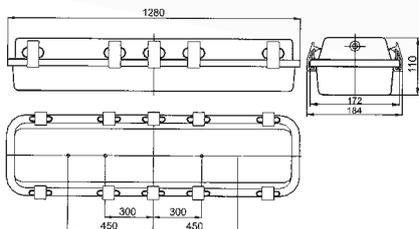

CE	⊕	IP65	EMERGENCY
Ta -25°C ÷ +40°C	VVG	EVG	EVG DIMM
Ø 26 6 13	Carton (mm/pcs): 1290 x 190 x 120 / 1		

**Use:** Light fitting for the illumination of indoor and outdoor moist, dusty industrial spaces such as halls, warehouses, workshops, corridors and cellars.

### Technical description:

The light fitting body is made of steel sheet, the caps are made of stainless steel or plastic. The optical cover is made of prismatic PC. The supporting plate with electrical equipment inside the light fitting is made of steel sheet finished with powder paint. The light fitting is designed as a through light fitting. The max. cross-section of the connecting conductors is 2.5 mm<sup>2</sup>.

### Installation:

On the ceiling, wall.

### Versions:

The light fittings are made in versions with an electromagnetic ballast (VVG), electronic ballast (EVG), electronic adjustable ballast (EVG DIMM), and emergency unit (EMERGENCY). Type 531 28 20 is designed for emergency illumination with autonomy 2 hours.

### To order:



Protective cover  
1-99.9617 PC



Plastic cap  
4-99.10213/1





Stainless steel cap  
4-99.6188/1

Type	Recommended light source [W]	Light fitting body	Cap	Socket	Weight [kg]
531 28 03 IN	3 x linear fluorescent tube T8 36	Varnished steel sheet	plastic	G13	6
531 28 13	3 x linear fluorescent tube T8 36	Varnished steel sheet	stainless	G13	6
531 28 20	3 x linear fluorescent tube T8 36	Varnished steel sheet	stainless	G13	6
531 28 19	3 x linear fluorescent tube T8 36	Stainless steel sheet	stainless	G13	6
531 41 01 (EP)	2 x linear fluorescent tube T8 36	Varnished steel sheet	plastic	G13	5
531 41 13 (EP)	2 x linear fluorescent tube T8 36	Varnished steel sheet	stainless	G13	5
531 41 19 (EP)	2 x linear fluorescent tube T8 36	Stainless steel sheet	stainless	G13	5

\*By adding the letter „K“ after the type designation, the light fittings will be equipped with protective basket (531 31 01K).

\*By adding the letters „EP“ after the type designation, the light fittings will be equipped with electronic ballasts (531 41 19 EP).

# RESIST

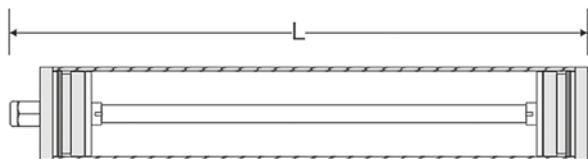

CE	⊕	IK10	IP 68-2	230V 50Hz	Ø 16 6 5	Ø 26 6 13	F	EMERGENCY
Ta -15°C ÷ +55°C	VVG	EVG	EVG DIMM	Carton (mm/pcs): 1650 x 200 x 210 / 1				

**Use:** Light fitting for the illumination of indoor and outdoor moist, dusty industrial spaces such as halls, warehouses, workshops, corridors, cellars and garages.

### Technical description:

The light fitting body is made up of a polycarbonate tube, thickness 3.5 mm, the end caps are made of nickel-plated steel. The reflector inside the light fitting is made of polished aluminium sheet. Thanks to its high degree of protection IP68, the light fitting can be immersed in water permanently up to a depth of 2 m. The max. cross-section of the connecting conductors is 2.5mm<sup>2</sup>.

### Installation:

On the ceiling, wall – with clamps, a wire suspension.

### Versions:

Light fittings are made in versions with an electromagnetic ballast (VVG), electronic ballast (EVG), electronic adjustable ballast (EVG DIMM), and with an emergency unit (EMERGENCY). Optionally, also an adjusted version for environments with a temperature of +85°C – only for types with T8 fluorescent tubes.

### To order:



Steel clamp with  
rubber coating



Stainless clamp



Wire suspension



2 polycarbonate clamps included  
in standard delivery

Type	Recommended light source [W]	Length L [mm]	Socket
RESIST-118	1 x linear fluorescent tube T8 18	709	G13
RESIST-136	1 x linear fluorescent tube T8 36	1319	G13
RESIST-158	1 x linear fluorescent tube T8 58	1624	G13
RESIST-218	2 x linear fluorescent tube T8 18	709	G13
RESIST-236	2 x linear fluorescent tube T8 36	1319	G13
RESIST-258	2 x linear fluorescent tube T8 58	1624	G13

VVG (the light fitting will be equipped with an electromagnetic ballast)

EVG (the light fitting will be equipped with an electronic ballast)

EVG DIMM (the light fitting will be equipped with an electronic dimmable ballast)

EMERGENCY (the light fitting will be equipped with an emergency unit)

# MERIDIAN/ MERIDIAN ALSi



**Use:** Light fitting for the illumination of industrial spaces such as halls, warehouses, workshops.

**Technical description:**

The light fitting body is made up of steel mouldings finished with powder paint. Electrical equipment is installed inside. The reflector is made of polished aluminium. The optical cover is made of hardened glass. The max. cross-section of the connecting conductors is 4 mm<sup>2</sup>.

**Installation:**

With a suspension eye, by suspending.

**Versions:**

Light fittings are made in versions with an electromagnetic ballast (VVG), for high-pressure sodium, halide or mercury discharge lamps.

**To order:**

CE	⏚	IP54	230V 50Hz	Ta -25°C ÷ +30°C
VVG	E40	Carton (mm/pcs): 570 x 570 x 800 / 1		



Rim with glass and sealing  
2-99.6107

Type – MERIDIAN	Recommended light source [W]	Socket	Weight [kg]
541 01 15	High-pressure sodium / halide discharge lamp 150	E40	15
541 01 25	High-pressure sodium discharge lamp 250	E40	15
541 01 26	High-pressure halide discharge lamp 250	E40	15
541 01 27	High-pressure mercury discharge lamp 250	E40	15
541 01 40	High-pressure sodium discharge lamp 400	E40	17
541 01 41	High-pressure halide discharge lamp 400	E40	17
541 01 42	High-pressure mercury discharge lamp 400	E40	17
541 01 50	Bulb CLAS 500	E40	17

Type – MERIDIAN ALSi	Recommended light source [W]	Socket	Weight [kg]
541 04 15 ALSi	High-pressure sodium / halide discharge lamp 150	E40	15
541 04 25 ALSi	High-pressure sodium discharge lamp 250	E40	15
541 04 26 ALSi	High-pressure halide discharge lamp 250	E40	15
541 04 27 ALSi	High-pressure mercury discharge lamp 250	E40	15
541 04 40 ALSi	High-pressure sodium discharge lamp 400	E40	17
541 04 41 ALSi	High-pressure halide discharge lamp 400	E40	17
541 04 42 ALSi	High-pressure mercury discharge lamp 400	E40	17
541 04 50 ALSi	Bulb CLAS 500	E40	17

# SACHO



**Use:** Light fitting for the illumination railroad tracks and railway areas.

**Technical description:**

The body is made of aluminium alloy. There is electrical equipment and rope holder of the bottom of the touch clutch. The body cover is made of steel sheet metal finished with powder paint. The reflector is made of aluminium sheet.

**Installation:**

By suspension.

**Versions:**

The light fittings are made in a version with an electromagnetic ballast (VVG).

**To order:** The light fitting can be produced with a protective glass.

CE	⏚	IP23	230V 50Hz	E40
<b>Ta</b> -20°C ÷ +30°C		<b>Carton (mm/pcs):</b> 580 x 580 x 910 / 1		

Type	Recommended light source [W]	Socket	Weight [kg]
449 06 03/ES	High-pressure sodium discharge lamp NAV-400	E40	15,2
449 06 04/ES	High-pressure sodium discharge lamp NAV-250	E40	12,2
449 06 05/ES	High-pressure sodium discharge lamp NAV-150	E40	10,7

# SACHO LED



**Use:** Light fitting for the illumination railroad tracks and railway areas.

**Technical description:** The body is made of aluminium alloy. There is electrical equipment and rope holder of the bottom of the touch clutch. The body cover is made of steel sheet metal finished with powder paint. The reflector is made of aluminium sheet.

**Installation:** By suspension.

**To order:** The light fitting can be produced with a protective glass.

CE	⏚	IP65 IP23	230V 50Hz	LED
<b>Ta</b> -20°C ÷ +50°C		<b>Carton (mm/pcs):</b> 580 x 580 x 910 / 1		

Type	Power input [W] / Luminous flux [lm]	Angle of beam [°]	Colour temperature [K]	CRI	Weight [kg]
449 06 04LED/ES	100 / 13 000	120	4500	>80	5,1
449 06 05LED/ES	150 / 19 500	120	4500	>80	8,2
449 06 06LED/ES	200 / 26 000	120	4500	>80	9,1






# MACHINE

CE		IP20	230V 50Hz	Ta ÷ 30°C
E27	Carton (mm/pcs): 830 x 425 x 155 / 4			

**Use:** For the local illumination of the worktops of machine tools and other machines.

**Technical description:**

The light fitting shade is made of pickled aluminium sheet, the outside is finished with powder paint. The cover is made of aluminium sheet, finished with powder paint and has a built-in switch. The arms of the steel pipes are finished with powder paint. The swivel joint enables the turning and tilting of the light fitting. The fasteners are ALSi alloy castings. The light fitting type 319 04 07 has a clamp and lead-in cable with a plug.

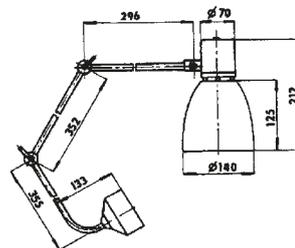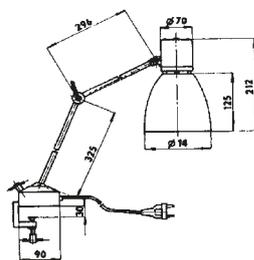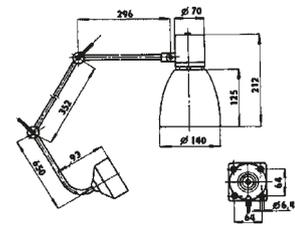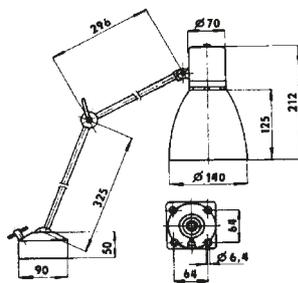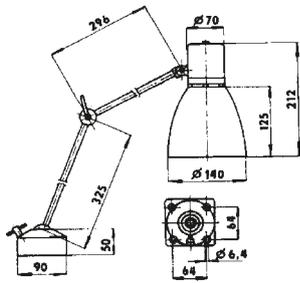


Type	Recommended light source [W]	Part of light fitting	Weight [kg]
319 04 06	Bulb CLAS 60 Halogen bulb 53	Fixing element + 2 arms	1,4
319 04 07		Vice + connecting cable with plug	1,6
319 04 08		Fixing element + 3 arms	1,4
319 04 09		Fixing element + 3 arms	1,3
319 18 01		Fixing element + 2 arms	1,1

\*It is possible to use a LED bulb 4W - 10W.



# Floodlights

# RPG I, II

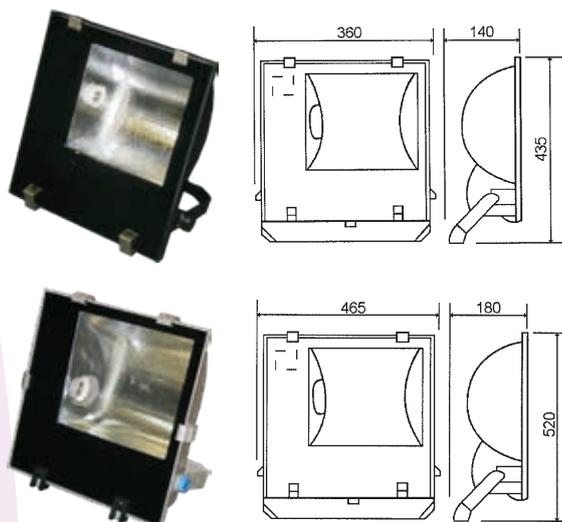

**Use:** Light fitting for the illumination of sports facilities, billboards, building facades, public areas as well as industrial spaces.

**Technical description:**

The light fitting body is an AlSi alloy casting finished with powder paint. The supply cable outlet is at the bottom of the body. The base plate with electrical equipment is fixed inside the light fitting. The symmetrical reflector is made of anodized aluminium sheet. The optical cover is made of hardened glass. The steel holder allows turning the floodlight to the required position. The max. cross-section of the connecting conductors is 2.5 mm<sup>2</sup>.

**Installation:**

On the ceiling, wall or another solid substrate (structure) ensuring firm connection.



**Versions:**

Light fittings are made in version with an electromagnetic ballast (VVG), for high-pressure sodium or halide discharge lamps.

CE	230V 50Hz	⊕	IP65	E27 E40	<b>Carton (mm/pcs):</b> RPG I 360 x 435 x 140 / 1 RPG II 465 x 520 x 180 / 1
Ta -25°C ÷ +35°C				VVG	

Type	Recommended light source [W]	Socket	Weight [kg]
743 02 70	High-pressure sodium / halide discharge lamp 70	E27	4,5
743 02 10	High-pressure sodium / halide discharge lamp 100	E40	5
743 02 15	High-pressure sodium / halide discharge lamp 150	E40	5
743 03 25	High-pressure sodium / halide discharge lamp 200	E40	9,5
743 03 40	High-pressure sodium / halide discharge lamp 400	E40	11

# HALSPOT I, II

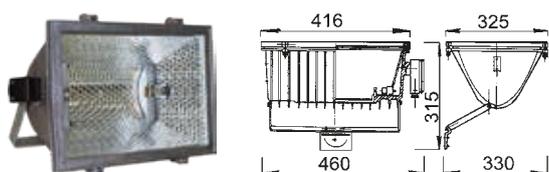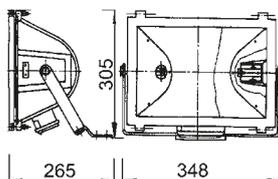

**Use:** Light fitting for the illumination of industrial and sports halls, sports areas, stadiums, public areas, ancient monuments, building facades,

**Technical description:**

The light fitting body is made of AlSi alloy without finish. The connecting box with a terminal board is fixed to the body. The light fitting reflector is made of chemically polished aluminium sheet. Protective hardened glass is mounted in the cover. The steel holder allows turning the floodlight to the required position. The max. cross-section of the connecting conductors is 2.5 mm<sup>2</sup>.

**Installation:**

On the ceiling, wall or another solid substrate (structure) ensuring firm connection.

**To order:**



Protective glass cover  
432.5008 (HALSPOT I)  
432.5035 (HALSPOT II)



Socket 4-99.5822/1  
HALSPOT I (length  
290 mm)



Socket 4-99.5825/1  
HALSPOT II (length 740  
mm)



Terminal box  
4-99.6028

CE	230V 50Hz	⊕	IP65	<b>Carton (mm/pcs):</b> HALSPOT I: 350 X 350 X 200 / 1 HALSPOT II: 460 X 570 X 285 / 1
Ta -25°C ÷ +40°C			R7s	

Type	Recommended light source [W]	Socket	Weight [kg]
723 01 01 (HALSPOT I)	Halogen linear bulb HALOLINE 1000	R7s	7
723 04 02 (HALSPOT II)	Halogen linear bulb HALOLINE 1500	R7s	10

# TITAN

**Use:** For illumination of sports facilities, car parks, ancient monuments, building facades, construction sites, halls and industrial spaces.


**Technical description:**

The light fitting body and cover are made of steel sheet finished with powder paint. The asymmetrical reflector is made of chemically polished aluminium sheet. The floodlight is provided with a terminal box for a cable  $\varnothing 6 - 9$  mm. The optical cover is made of hardened glass. The steel holder allows turning the floodlight to the required position. The max. cross-section of connecting conductors is 2.5 mm<sup>2</sup>. The ballast box is not part of the floodlight.

**Installation:**

On a pole or another solid substrate (structure) ensuring firm connection.

**To order:**

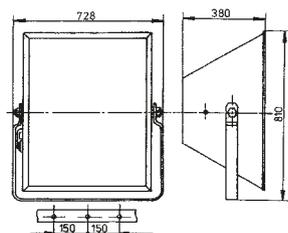

CE	230V 50Hz	IP54	VVG	E40
Ta -25°C ÷ +30°C		Carton (mm/pcs): 850 x 750 x 420 / 1		



Ballast box  
BOX T



Terminal box  
4-99.6028



Socket  
3-99.10246

Type	Recommended light source [W]	Socket	Weight [kg]
541 19 01	High-pressure halide discharge lamp 2000 / 400 V	E40	30,5
541 19 02	High-pressure halide discharge lamp 1000 / 230 V	E40	25

## Ballast box BOX T



**Use:** For the operation of high-pressure halide lamps 1000 W and 2000 W, e.g. TITAN floodlight.


**Technical description:**

The box is made of thermoplastic material. The box is provided with three cable outlets. Two PG 16 outlets for the power supply through the conductor and one PG 13.5 outlet for connecting the light fitting. Due to the passage of a high-voltage pulse from the starter, after connecting the ballast box and the light fitting, a conductor must be used which passes a voltage test of 4.5 kV. The cable between the ballast box and the light fitting may be a max. of 50 m long.

CE	IP55	E40	VVG	230V 50Hz	400V 50Hz
Ta -25°C ÷ +30°C		Carton (mm/pcs): 350 x 260 x 190 / 1			

Type	Recommended light source [W]	Weight [kg]
622.1 ES	High-pressure halide discharge lamp 2000 / 400 V (10,3A)	17
622.2 ES	High-pressure halide discharge lamp 1000 / 230 V	13

# SPOT I

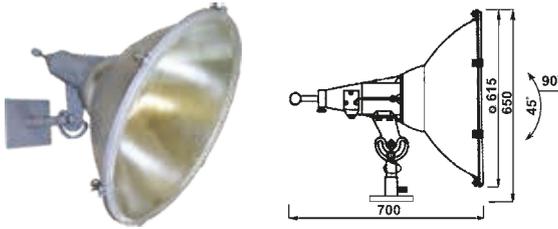

CE	230V 50Hz	⊕	IP54	E40
<b>Ta</b>				
-25°C ÷ +45°C for 713 01 02				
-25°C ÷ +30°C for 743 01 02, 03				
<b>Carton (mm/pcs): 630 x 630 x 580 / 1</b>				

**Use:** Light fitting for the illumination of sports facilities, car parks, ancient monuments, building facades, construction sites as well as industrial spaces.

### Technical description:

The light fitting body is an AlSi alloy casting finished with powder paint. The reflector is made of anodized, chemically polished aluminium sheet. The optical cover is made of hardened safety glass. To change the radiation pattern, the light source position is adjustable by means of a drawbar. The holder enables the turning of the floodlight in both the horizontal and vertical position. As a standard, the floodlight is supplied with a base-type holder (weld type to order). The max. cross-section of the connecting conductors is 2.5 mm<sup>2</sup>.

### Installation:

On the wall, pole or another solid substrate (structure) ensuring firm connection.

### To order:



Rim with glass and silicone seal  
2-99.7043/2  
for bulb sources



Rim with glass and rubber seal  
2-99.7043/1  
for discharge lamp sources



Base-type holder  
4-99.5526  
(standard)



Welder-on holder  
4-99.6019  
(to order)

Type	Recommended light source [W]	Ballast box	Rim- seal - glass	Weight [kg]
713 01 02	Bulb SPC.A T CL 500	-	silicon 2-99.7043/2	10
	Blended lamp 500			
743 01 02	High-pressure mercury discharge lamp 400	1-99.5868	rubber 2-99.7043/1	10
743 01 03	High-pressure sodium discharge lamp 400	1-99.5864	rubber 2-99.7043/1	10
	High-pressure halide discharge lamp 400	1-99.5871		

# SPOT II



CE	230V 50Hz	⊕	IP54	VVG	E40
<b>Ta</b>		<b>Carton (mm/pcs):</b>			
-25°C ÷ +35°C		630 x 630 x 550 / 1			

**Use:** Light fitting for the illumination of sports facilities, car parks, ancient monuments, building facades, construction sites, halls as well as industrial spaces.

### Technical description:

The light fitting body is an AlSi alloy casting finished with powder paint. The aluminium ballast box with electrical equipment inside is fixed to the body. The reflector is made of anodized, chemically polished aluminium sheet. The optical cover is made of hardened safety glass. To change the radiation pattern, the light source position is adjustable by means of a drawbar. The holder enables turning the floodlight in both the horizontal and vertical position. As a standard, the floodlight is supplied with a base-type holder (weld type to order). The max. cross-section of the connecting conductors is 6 mm<sup>2</sup>.

### Installation:

On the wall, pole or another solid substrate (structure) ensuring firm connection.

### To order:



Rim with glass and rubber seal  
2-99.7043/1  
for discharge lamp sources




Base-type holder  
4-99.5526



Welder-on holder  
4-99.6019  
(to order)

Type	Recommended light source [W]	Weight [kg]
743 01 05	High-pressure sodium discharge lamp (NAV SUPER) 600	13
743 01 06	High-pressure sodium discharge lamp 400	13
743 01 07	High-pressure sodium discharge lamp 250	13
743 01 08	High-pressure mercury discharge lamp 400	13
743 01 09	High-pressure mercury discharge lamp 250	13
743 01 10	High-pressure halide discharge lamp 400	13

# Ballast box BOX 7

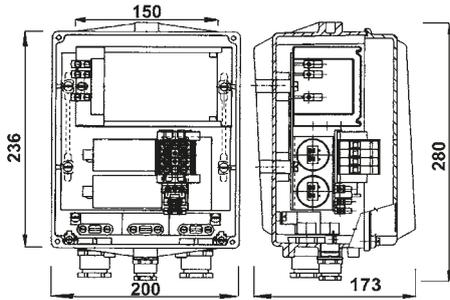

**Use:** For the operation of discharge light fittings and floodlights such as the floodlight SPOT I.

### Technical description:

The body and cover are AlSi alloy castings finished with powder paint. Electrical equipment is installed inside. Two P21 outlets are designed for connecting cables, the P13.5 outlet serves for connecting the light fitting. The max. cross-section of the connecting conductors is 6 mm<sup>2</sup>. The box is designed as a through box, for the terminal version it is provided with a seal washer. Can be mounted on the wall by means of M6 threads in the body or holder, type 438.2688/1.

CE	230V 50Hz	⊕	IP54	VVG	E40
Ta -25°C ÷ +35°C		Carton (mm/pcs): 290 x 210 x 180 / 1			

Type	Recommended light source [W]	Weight [kg]
1-99.5864	High-pressure sodium discharge lamp 400	8,5
1-99.5865	High-pressure sodium discharge lamp 250	7
1-99.5866	High-pressure sodium discharge lamp 150	7
1-99.5867	High-pressure sodium discharge lamp 100	7
1-99.5868	High-pressure mercury discharge lamp 400	8,5
1-99.5871	High-pressure halide discharge lamp 400	7

## References



Stud farm in Kladruby



NAFTAN petrochemical plant in Belarus



Pumping station in Čierna nad Tisou




Petrochemical plant in Ramadan v Egypt



## Outdoor light fittings

# SADOVKA

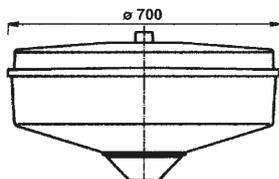

CE	230V 50Hz	IP54	E27	E40
VVG	EVG DIMM	Ta -25°C ÷ +30°C		
Carton (mm/pcs): 725 x 725 x 440 / 1				

**Use:** Light fitting for the illumination of roads, streets, pedestrian zones, parks and other public areas.

### Technical description:

The top cover of the light fitting is made of polypropylene filled with glass fibres; the bottom cover is made of opal PMMA. The nut for fixing the top cover is made of silamide. The pedestal consists of a prepreg cone and an AlSi alloy holder for fixing onto a column. The removal base plate with electrical equipment is fixed to the light fitting pedestal. The light fitting is made in brown (H) or grey (S) colour. The light fitting is to be fixed to a column shank  $\varnothing 60$  mm. The max. cross-section of the connecting conductors is 2.5 mm<sup>2</sup>.

**Installation:** On a column.

### Versions:

Light fittings are made in versions with an electromagnetic ballast (VVG), for high-pressure sodium, halide or mercury discharge lamps. Light fittings can also be equipped with electronic adjustable ballasts (EVG DIMM).

### To order:



Top cover  
242.2587  
grey (S) / brown (H)



Bottom cover  
242.5024/1  
until 1995



Bottom cover  
342.2584  
since 1995




Silamide nut  
412.2560

Type	Recommended light source [W]	Electronic ballast dimmable	Weight [kg]
446 05 50	High-pressure sodium discharge lamp 50	-	11
446 05 53	High-pressure sodium discharge lamp 50	Yes	11
446 05 71	High-pressure sodium discharge lamp 70	-	11
	High-pressure halide discharge lamp 70	-	11
446 05 73	High-pressure sodium discharge lamp 70	Yes	10,7
446 05 11	High-pressure sodium discharge lamp 100	-	11
	High-pressure halide discharge lamp 100	-	11
446 05 16	High-pressure sodium discharge lamp 150	-	12
	High-pressure halide discharge lamp 150	-	12
446 05 26	High-pressure mercury discharge lamp 125	-	11
446 05 25	High-pressure mercury discharge lamp 250	-	11

\*It is possible to use a LED bulb 8W - 90W.

# KUZEL

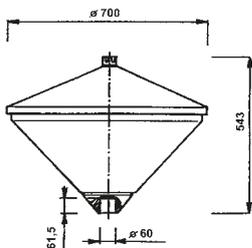

CE	230V 50Hz	IP54	E27	E40
VVG	EVG DIMM	Ta -25°C ÷ +30°C		
Carton (mm/pcs): 705 x 705 x 550 / 1				

**Use:** Light fitting for the illumination of pedestrian zones, parks, orchards and other public areas.

**Technical description:** The top cover of the light fitting is made of prepreg, the bottom cover is made of opal PMMA. The nut for fixing the top cover is made of silamide. The pedestal is made up of a prepreg cone and an AlSi alloy holder for fixing onto a column. The removal base plate with electrical equipment is fixed to the light fitting pedestal. The light fitting is to be fixed to a column shank  $\varnothing 60$  mm. The max. cross-section of the connecting conductors is 2.5 mm<sup>2</sup>.

**Installation:** On a column.

### Versions:

Light fittings are made in versions with an electromagnetic ballast (VVG), for high-pressure sodium, halide or mercury discharge lamps. Light fittings can be also equipped with electronic adjustable ballasts (EVG DIMM).

### To order:



Bottom cover  
342.2554




Silamide nut  
412.2560

Type	Recommended light source [W]	Electronic ballast dimmable	Weight [kg]
446 27 05	High-pressure sodium discharge lamp 50	-	13
446 27 53	High-pressure sodium discharge lamp 50	Yes	13
446 27 07	High-pressure sodium/halide discharge lamp 70	-	13
446 27 73	High-pressure sodium discharge lamp 70	Yes	13
446 27 09	High-pressure sodium/halide discharge lamp 100	-	13
446 27 01	High-pressure mercury discharge lamp 80	-	13
446 27 03	High-pressure mercury discharge lamp 125	-	13

\*It is possible to use a LED bulb 8W-20W.

## KOULE A

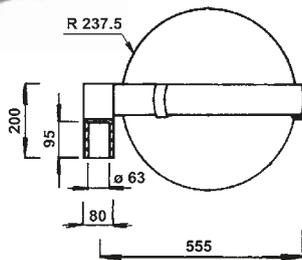

CE	230V 50Hz	⊕	IP 54/23	E27
VVG	EVG DIMM	Ta -25°C ÷ +30°C		
Carton (mm/pcs): 550 x 550 x 510 / 1				

**Use:** Light fitting for the decorative light fitting of pedestrian zones, parks, orchards and other public areas.

### Technical description:

The light fitting consists of a carrier and body (AlSi castings) connected with screws and two semi-spherical covers. A prepreg decorative strip is fixed to the body from the outside and electrical equipment from the inside. The top cover is firmly screwed to the body, the bottom cover is fixed with PC caps. The light fitting is made in green (Z) or grey (S) colour. The light fitting is to be fixed to a column shank  $\varnothing 60$  mm. The max. cross-section of the connecting conductors is 2.5 mm<sup>2</sup>.

**Installation:** On a column.

### Versions:

The light fittings are made in a version with an electromagnetic ballast (VVG), for high-pressure sodium or halide discharge lamps. The light fittings can also be equipped with electronic adjustable ballasts (EVG DIMM). Type 446 16 xx – both covers made of opal PMMA, the luminous flux is non-directional. Type 446 17 xx – the top cover is made of prepreg, the bottom cover of clear PMMA, luminous flux is directed by a symmetrical reflector.

**To order:**



Bottom cover clear  
042.5549/1



Bottom cover opal  
042.5550/1




PC cap  
317.5016/1

Type	Recommended light source [W]	Electronic ballast dimmable	Weight [kg]
446 16 01	High-pressure sodium discharge lamp 50	-	8
446 16 02	High-pressure sodium/halide discharge lamp 70	-	9
446 17 01	High-pressure sodium discharge lamp 50	-	8
446 17 02	High-pressure sodium/halide discharge lamp 70	-	9

\*It is possible to use a LED bulb 8W - 10W.

# KOULE B

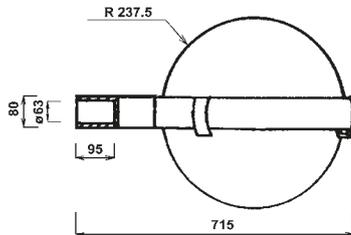

CE	230V 50Hz	IP 54/23	E27
VVG	EVG DIMM	Ta -25°C ÷ +30°C	
Carton (mm/pcs): 550 x 550 x 510 / 1			

**Use:** Light fitting for the decorative light fitting of pedestrian zones, parks, orchards and other public areas.

### Technical description:

The light fitting consists of a carrier and body (AlSi castings) connected with screws and two semi-spherical covers. A prepreg decorative strip is fixed to the body from the outside and electrical equipment from the inside. The top cover is firmly screwed to the body, the bottom cover is fixed with PC caps. The light fitting is to be fixed to a column boom  $\phi 60$  mm. The max. cross-section of the connecting conductors is 2.5 mm<sup>2</sup>.

### Versions:

Light fittings are made in a version with an electromagnetic ballast (VVG), for high-pressure sodium or halide discharge lamps. Light fittings can be also equipped with electronic adjustable ballasts (EVG DIMM). Type 446 19 xx – both covers made of opal PMMA, the luminous flux is non-directional. Type 446 20 xx – the top cover is made of prepreg, the bottom cover of clear PMMA, luminous flux is directed by a symmetrical reflector.

### To order:



Bottom cover clear  
042.5549/1



Bottom cover opal  
042.5550/1



PC cap  
317.5016/1



Fastener 2-arm  
2-99.9267



Fastener 3-arm  
2-99.9268




Fastener 4-arm  
2-99.9269

Type	Recommended light source [W]	Electronic ballast dimmable	Weight [kg]
446 19 01	High-pressure sodium discharge lamp 50	-	8
446 19 02	High-pressure sodium/halide discharge lamp 70	-	9
446 20 01	High-pressure mercury discharge lamp 50	-	8
446 20 02	High-pressure mercury discharge lamp 70	-	9

\*It is possible to use a LED bulb 8W - 10W.

# AURIS

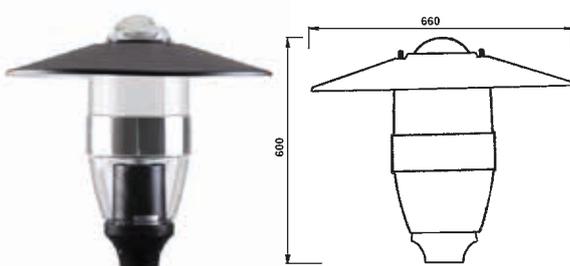

CE	230V 50Hz	IP65	E27	E40
VVG		Ta -25°C ÷ +30°C		
Carton (mm/pcs): 705 x 705 x 550 / 1				

**Use:** Light fitting for the illumination of pedestrian zones, parks, orchards and other public areas.

### Technical description:

The light fitting body and top cover are made of plastic. The optical cover is made of opal or clear PC. The removal base plate with electrical equipment is fixed to the top cover of the light fitting. The light fitting is to be fixed to a column shank  $\phi 60$  mm. The max. cross-section of the connecting conductors is 2.5 mm<sup>2</sup>.

### To order:

Cover PMMA.

Type	Recommended light source [W]	Weight [kg]
446 37 50	High-pressure sodium discharge lamp 50	4,1
446 37 70	High-pressure sodium/halide discharge lamp 70	4,3
446 37 10	High-pressure sodium/halide discharge lamp 100	4,5
446 37 80	High-pressure mercury discharge lamp 80	3,8
446 37 12	High-pressure mercury discharge lamp 125	4,1

\*It is possible to use a LED bulb 8W - 20W.

# LUCERNA



CE	230V 50Hz	IP65	E27
VVG		Ta -25°C ÷ +30°C	
Carton (mm/pcs): 380 x 380 x 580 / 1			

**Use:** Light fitting for the illumination of pedestrian zones, parks, orchards and other public areas.

**Technical description:**

The light fitting body and top cover are made of plastic. The optical cover is made of opal or clear PC. The removal base plate with electrical equipment is fixed to the top cover of the light fitting. The light fitting is to be fixed to a column shank  $\varnothing 60$  mm. The max. cross-section of the connecting conductors is 2.5 mm<sup>2</sup>.

**Installation:**


The light fitting is to be fixed to a column shank  $\varnothing 60$  mm. The max. cross-section of the connecting conductors is 2,5mm<sup>2</sup>.

**To order:**



Type	Recommended light source [W]	Weight [kg]
446 60 15	Bulb (halogenid) max. 150	4,2
446 60 70	High-pressure sodium/halide discharge lamp 70	5,6
446 60 80	High-pressure mercury discharge lamp 80	5,2
446 60 12	High-pressure mercury discharge lamp 125	5,3

# OPAL

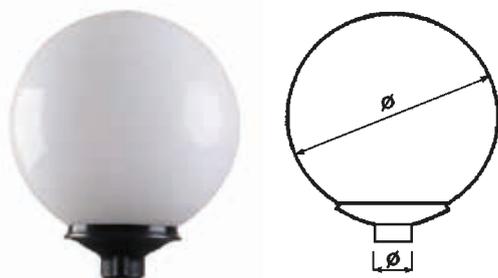

CE	230V 50Hz	IP65	E27	E40
VVG		Ta -25°C ÷ +30°C		
Carton (mm/pcs): 550 x 550 x 550 / 1				

**Use:** Light fitting for the illumination of pedestrian zones, parks, orchards and other public areas.

**Technical description:**

The light fitting body is a PC moulding. The optical cover is made up of an opal PMMA moulding  $\varnothing 450$  mm. The removal base plate with electrical equipment is fixed to the light fitting body by a three-point bayonet. The light fitting is to be fixed to a column shank  $\varnothing 60$  mm. The max. cross-section of the connecting conductors is 2.5 mm<sup>2</sup>.

**To order:**

Stainless steel grille, opal cover, prismatic, clear or with top silver paint.



Opal cover

Type	Recommended light source [W]	Electronic ballast dimmable	Weight [kg]
446 36 50	High-pressure sodium discharge lamp 50	-	3,8
446 36 70	High-pressure sodium/halide discharge lamp 70	-	4,1
446 36 73	High-pressure sodium discharge lamp 70	Yes	3,5
446 36 10	High-pressure sodium/halide discharge lamp 100	-	4,3
446 36 80	High-pressure mercury discharge lamp 80	-	3,6
446 36 12	High-pressure mercury discharge lamp 125	-	3,8

\*It is possible to use a LED bulb 8W - 20W.

# RAMINKO



**Use:** Light fitting for the illumination of roads, parks, car parks, public areas as well as industrial spaces.

**Technical description:**


The light fitting body is made of prepreg. The optical cover is made of PMMA. The reflector is made of polished or anodized aluminium sheet. Electrical equipment with a 2 A fuse is fixed into the light fitting body. The max. cross-section of the connecting conductors is 2.5 mm<sup>2</sup>.

**Installation:**

On a column with a boom.

**To order:**

CE	230V 50Hz	⊕	IP 43/23	E27
VVG	Ta -25°C ÷ +30°C			
Carton (mm/pcs): 690 x 360 x 290 / 1				

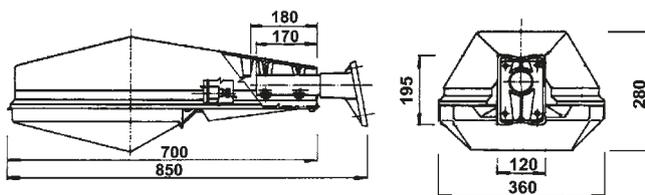

Clear cover  
4-99.8105/1



Boom  
2-99.5581/1



Boom on the wall  
3-99.10222



Boom on concrete  
column 4-99.10230



Fastener on column  
shank 3-99.6026



Wall holder  
MACH 60



Fastener  
JET 60-60-90



Boom UDŠ 300,  
UDŠ 500, UDŠ 1000,  
UDŠ 1500, UDŠ 2000



Reduction  
76 - 60



Boom UDŠ 300 R  
Boom UDŠ 500 R

Type	Recommended light source [W]	Weight [kg]
444 19 70	High-pressure sodium discharge lamp 70	7,5
	High-pressure halide discharge lamp 70	7,5
444 19 71	High-pressure mercury discharge lamp 80	7
444 19 72	High-pressure mercury discharge lamp 125	7,5



Type	Reflector 164.5504 chem. polished	Reflector 164.2540 anodized	Holder 2-99.5581	Seal 451.2674
444 19 70	+	-	+	+
444 19 71	+	-	+	+
444 19 72	+	-	+	+
444 19 70 A	-	+	+	+
444 19 70 C	+	-	-	-
444 19 71 C	+	-	-	-
444 19 72 C	+	-	-	-
444 19 70 D	-	+	-	-
444 19 71 D	-	+	-	-
444 19 72 D	-	+	-	-

\*It is possible to use a LED bulb 8W - 20W.

## Key - symbols used

	Marking of equipment of use in potentially explosive atmosphere		Degree of protection I		Packing (carton, dimensions number of pcs)
	EU conformity certificate		Degree of protection II		Lamp requires ignitor
	LED light source		Rated max. ambient temperature (°C)		Eletromagnetic ballast
	Certification of equipment intended for use in potentially explosive atmospheres in the EU		Working alternating current voltage		Electronic ballast
	Degree of protection		Working direct-current voltage		Dimmable electronic ballast

## Spare parts and accessories

						
Bottom cover clear KOULE A, KOULE B 042.5549/1	Bottom cover opal KOULE A, KOULE B 042.5550/1	Upper cover opal KOULE A, KOULE B 1-99.9266/1	Protective basket MINEX II, SIRIUS, HERKULES 1-99.5856	Protective basket TRILUX 1-99.5984/1	Protective basket BILUX, SAFELUX, MULTISAFE 1-99.5992/1	Protective basket TURTLE 1-99.8534/1
						
Protective basket TUB 1-99.8535/1	Protective cover PRACHO - PMMA 1-99.9617 PC	Protective cover PRACHO, LINEX - PC 142.5511/2	Protective glass BILUX, TUB, SAFELUX, MULTISAFE 132.5069	Al shade MINEX II, SIRIUS, HERKULES 154.5041/02	Protective cover plastic FARMER I, II, III 182.5005	Protective cover PC FARMER I, II, III 182.2540
						
Blinding screw V-Ms-VMQ-Ex (pro F) M25x1,5 - ORION, SIRIUS	Blinding screw V-Ms-VMQ-Ex (pro F) M20x1,5 - HERKULES	Springy suspension SIMPLEX 2-99.5550	Bracket Ø 60mm RAMINKO, CITY, STREET 2-99.5581/1	Flange with glass SIRIUS, HERKULES (stand. t., K) 2-99.5862/1	Flange with glass SIRIUS, HERKULES (verze F, KF) 2-99.5862F/1	Flange with glass MINEX II 2-99.5917
						
Circleborder + glass + sealing MERIDIAN 2-99.6107	Circleborder + glass + sealing (rubber seal) SPOT I, SPOT II 2-99.7043/1	Circleborder + glass + sealing (silicone seal) SPOT I 2-99.7043/2	Protective basket MINEX I, ORION 2-99.7461	Reflector HALSPOT I (723 01 01) 2-99.7126	Reflector HALSPOT II (723 04 02) 2-99.7603	Fixing element: 2-arm KOULE B 2-99.9267
						
Fixing element: 3-arm KOULE B 2-99.9268	Fixing element: 4-arm KOULE B 2-99.9269	Protective glass FARMER I, II, III 232.5068/1	Protective glass TRILUX, TURTLE 232.5070	Upper cover (H or S) SADOVKA 242.2587	Lower cover until 1995 SADOVKA 242.5024/1	Lower cover since 1995 SADOVKA 342.2584
						
Al shade SIMPLEX, MINEX I, ORION 254.5021/01	Bracket Ø 60mm RAMINKO, CITY, STREET 3-99.10222	Lampholder TITAN 3-99.10246	Flange with glass ORION 3-99.5722/1	Flange with glass MINEX I 3-99.5741/1	Fixing element Ø 60mm RAMINKO, STREET 3-99.6026	Key M 205x2 MINEX I, ORION 3-99.6158/1



Key M 205x2  
MINEX II, SIRIUS  
3-99.6159



Flange cable gland  
MINEX I, MINEX II  
3-996170/1



Plastic clamp  
KOULE A, KOULE B  
317.5016/1



Protective glass  
SIMPLEX  
332.5018



Lower cover  
KUZEL  
342.2554



Plastic clamp PRACHO  
4-99.10213/1



Stainless steel clamp  
LINEX, PRACHO  
4-99.6188/1



Bracket Ø 60mm RAMINKO,  
CITY, STREET 4-99.10230



Protective cover  
54116 xx  
4-99.5501



Lampholder + condutor  
290 mm HALSPOT I  
4-99.5822/1



Lampholder + condutor  
290 mm HALSPOT I  
(with isolation)  
4-99.5822/1a



Lampholder + condutor  
780mm HALSPOT II  
4-99.5825/1



Lampholder + condutor  
780mm HALSPOT II  
(with isolation)  
4-99.5825/1a



Base holder  
SPOT I, SPOT II  
4-99.5526



Welder-on holder  
SPOT I, SPOT II  
4-99.6019



Connection box TITAN,  
HALSPOT I, HALSPOT II  
4-99.6028



Ceiling suspension  
SIMPLEX, ORION  
4-99.7995



Ceiling suspension  
MINEX I  
4-99.8103



Cover RAMINKO  
4-99.8105/1



Metal clip - steel  
FARMER I, II, III  
4-99.8470/01



Metal clip - stainless steel  
FARMER I, II, III  
4-99.6180/01



Protective cover  
446 10 xx  
4-99.9012/1



Construction spanner  
M5A  
401.A



Construction spanner  
M8  
402



Construction spanner  
M12 (BOX 1)  
404



Silamid nut  
SADOVKA, KUZEL  
412.2560



Protective glass  
HALSPOT I  
32.5008



Protective glass  
HALSPOT II  
432.5035



Blinding plug 16  
MINEX I, MINEX II, BOX 1  
547.2540/1



Cable gland  
HSK-K-Ex M25x1,5  
ORION, SIRIUS



Cable gland  
HSK-K-Ex M20x1,5  
HERKULES



Blinding plug  
V-Ex M25x1,5  
ORION, SIRIUS



Blinding plug  
V-Ex M20x1,5  
HERKULES



Protective basket  
SIMPLEX  
2-99.6195



Bracket Ø 60mm JET  
60-60-90



Reduction Ø 76/60 mm,  
Redukce 76-60



Fixing arm  
S 2 - sloup S



Fixing arm  
P 2 - sloup SP



Nut of cable gland  
GM-FS BILUX, TRILUX,  
SAFELUX



Bracket Ø 60 mm  
MACH 60



Holder HERKULES  
3-99.6183



Bracket on wall KR  
LUCERNA



Fixing arm  
S 3 - sloup S



Fixing arm  
P 3 - sloup SP



Nut of cable gland  
GM - Ms BILUX, TRILUX



Bracket Ø 60 mm -  
UDS 300, UDS 500,  
UDS 1000, UDS 1500,  
UDS 2500



Bracket ORION,  
MINEX I, MINEX II  
338.2735



Fixing arm  
S 1 -  
sloup S



Fixing arm  
P 1 - sloup SP



Fixing arm  
S 3+1 - sloup S



Fixing arm  
P 3+1 - sloup SP



Cable gland  
HSK-M-PVDF-Ex  
Trilux



Bracket Ø 60mm  
UDS 300 R,  
UDS 500 R



Cable gland  
HSK-M-Ex  
BILUX, TRILUX



Terminal block TB-1, pole S,  
pole SP, illuminative poles  
SAM, SAP



Protective basket steel  
FARMER I, II, III  
1-99.6248

## Rejstřík všech svítidel

Type	Model	Purpose	Page	Type	Model	Purpose	Page
1-99.5864	BOX 7	ballast box for floodlights	43	449 06 04 LED/ES	SACHO LED	special luminaire	37
1-99.5865	BOX 7	ballast box for floodlights	43	449 06 05 LED/ES	SACHO LED	special luminaire	37
1-99.5866	BOX 7	ballast box for floodlights	43	449 06 06 LED/ES	SACHO LED	special luminaire	37
1-99.5867	BOX 7	ballast box for floodlights	43	511 14 07	JUNIOR	industrial luminaire	32
1-99.5868	BOX 7	ballast box for floodlights	43	511 14 07 n	SIMPLEX	flameproof luminaire for Zone 2/22	16
1-99.5871	BOX 7	ballast box for floodlights	43	511 14 07 nt	SIMPLEX	flameproof luminaire for Zone 2/22	16
319 04 06	MACHINE	special luminaire	38	511 14 07 nSt	SIMPLEX	flameproof luminaire for Zone 2/22	16
319 04 07	MACHINE	special luminaire	38	511 14 07 nF	SIMPLEX	flameproof luminaire for Zone 2/22	16
319 04 08	MACHINE	special luminaire	38	511 14 07 nFt	SIMPLEX	flameproof luminaire for Zone 2/22	16
319 04 09	MACHINE	special luminaire	38	511 29 01	FARMER I	industrial luminaire	30
319 18 01	MACHINE	special luminaire	38	511 29 01 tF	FARMER I	industrial luminaire	30
444 19 70	RAMINKO	outdoor luminaire on bracket	49	511 29 02	FARMER I	industrial luminaire	30
444 19 71	RAMINKO	outdoor luminaire on bracket	49	511 29 02 tF	FARMER I	industrial luminaire	30
444 19 72	RAMINKO	outdoor luminaire on bracket	49	511 32 01	TUB	industrial luminaire	33
446 05 50	SADOVKA	outdoor luminaire on pole	45	511 32 01 EM	TUB	industrial luminaire	33
446 05 53	SADOVKA	outdoor luminaire on pole	45	511 32 01 tF	TUB	industrial luminaire	33
446 05 71	SADOVKA	outdoor luminaire on pole	45	511 32 24	TUB	industrial luminaire	33
446 05 73	SADOVKA	outdoor luminaire on pole	45	511 32 01 n	BILUX	flameproof luminaire for Zone 2/22	17
446 05 11	SADOVKA	outdoor luminaire on pole	45	511 32 01 nt	BILUX	flameproof luminaire for Zone 2/22	17
446 05 16	SADOVKA	outdoor luminaire on pole	45	511 32 01 nSt	BILUX	flameproof luminaire for Zone 2/22	17
446 05 26	SADOVKA	outdoor luminaire on pole	45	511 32 01 nF	BILUX	flameproof luminaire for Zone 2/22	17
446 05 25	SADOVKA	outdoor luminaire on pole	45	511 32 01 nFt	BILUX	flameproof luminaire for Zone 2/22	17
446 16 01	KOULE A	outdoor luminaire on pole	46	511 33 02	TURTLE	industrial luminaire	34
446 16 02	KOULE A	outdoor luminaire on pole	46	511 33 02 Ht	TURTLE	industrial luminaire	34
446 17 01	KOULE A	outdoor luminaire on pole	46	511 33 02 n	TRILUX	flameproof luminaire for Zone 2/22	18
446 17 02	KOULE A	outdoor luminaire on pole	46	511 33 02 nt	TRILUX	flameproof luminaire for Zone 2/22	18
446 19 01	KOULE B	outdoor luminaire on bracket	47	511 33 02 nSt	TRILUX	flameproof luminaire for Zone 2/22	18
446 19 02	KOULE B	outdoor luminaire on bracket	47	511 33 02 nHt	TRILUX	flameproof luminaire for Zone 2/22	18
446 20 01	KOULE B	outdoor luminaire on bracket	47	511 33 02 nF	TRILUX	flameproof luminaire for Zone 2/22	18
446 20 02	KOULE B	outdoor luminaire on bracket	47	511 33 02 nFt	TRILUX	flameproof luminaire for Zone 2/22	18
446 27 05	KUZEL	outdoor luminaire on pole	45	511 37 01	MINEX I	flameproof luminaire for mines	9
446 27 53	KUZEL	outdoor luminaire on pole	45	511 37 02	ORION	flameproof luminaire for Zone 2/22	10
446 27 07	KUZEL	outdoor luminaire on pole	45	511 37 02 t	ORION	flameproof luminaire for Zone 2/22	10
446 27 73	KUZEL	outdoor luminaire on pole	45	511 37 02 F	ORION	flameproof luminaire for Zone 2/22	10
446 27 09	KUZEL	outdoor luminaire on pole	45	511 37 02 S	ORION	flameproof luminaire for Zone 2/22	10
446 27 01	KUZEL	outdoor luminaire on pole	45	511 38 02	SIRIUS	flameproof luminaire for Zone 1/21	12
446 27 03	KUZEL	outdoor luminaire on pole	45	511 38 02 t	SIRIUS	flameproof luminaire for Zone 1/21	12
446 27 03	KUZEL	outdoor luminaire on pole	45	511 38 02 F	SIRIUS	flameproof luminaire for Zone 1/21	12
446 36 50	OPAL	outdoor luminaire on pole	48	511 41 01	PEGAS	industrial luminaire	33
446 36 70	OPAL	outdoor luminaire on pole	48	511 41 02	PEGAS	industrial luminaire	33
446 36 73	OPAL	outdoor luminaire on pole	48	511 41 03	PEGAS	industrial luminaire	33
446 36 10	OPAL	outdoor luminaire on pole	48	512 04 01	FARMER I	industrial luminaire	30
446 36 80	OPAL	outdoor luminaire on pole	48	512 04 01 tF	FARMER I	industrial luminaire	30
446 36 12	OPAL	outdoor luminaire on pole	48	513 04 01	FARMER I	industrial luminaire	30
446 37 50	AURIS	outdoor luminaire on pole	47	513 04 01 tF	FARMER I	industrial luminaire	30
446 37 70	AURIS	outdoor luminaire on pole	47	531 28 03 IN	PRACHO	industrial luminaire	35
446 37 10	AURIS	outdoor luminaire on pole	47	531 28 13	PRACHO	industrial luminaire	35
446 37 80	AURIS	outdoor luminaire on pole	47	531 28 19	PRACHO	industrial luminaire	35
446 37 12	AURIS	outdoor luminaire on pole	47	531 28 20	PRACHO	industrial luminaire	35
446 37 80	AURIS	outdoor luminaire on pole	47	531 41 01	PRACHO	industrial luminaire	35
446 37 12	AURIS	outdoor luminaire on pole	47	531 41 01 EP	PRACHO	industrial luminaire	35
446 60 15	LUCERNA	outdoor luminaire on pole	48	531 41 13	PRACHO	industrial luminaire	35
446 60 70	LUCERNA	outdoor luminaire on pole	48	531 41 13 EP	PRACHO	industrial luminaire	35
446 60 80	LUCERNA	outdoor luminaire on pole	48				
446 60 12	LUCERNA	outdoor luminaire on pole	48				
449 06 03/ES	SACHO	special luminaire	37				
449 06 04/ES	SACHO	special luminaire	37				
449 06 05/ES	SACHO	special luminaire	37				

Type	Model	Purpose	Page
531 41 19	PRACHO	industrial luminaire	35
531 41 19 EP	PRACHO	industrial luminaire	35
<b>531 42 01</b>	<b>ZONEX</b>	<b>flameproof luminaire for Zone 1/21</b>	<b>20</b>
531 41 01 EM	ZONEX	flameproof luminaire for Zone 1/21	20
531 42 02	ZONEX	flameproof luminaire for Zone 1/21	20
531 41 02 EM	ZONEX	flameproof luminaire for Zone 1/21	20
531 42 03	ZONEX	flameproof luminaire for Zone 1/21	20
531 42 03 EM	ZONEX	flameproof luminaire for Zone 1/21	20
531 42 04	ZONEX	flameproof luminaire for Zone 1/21	20
531 42 04 EM	ZONEX	flameproof luminaire for Zone 1/21	20
<b>531 43 01</b>	<b>LINEX</b>	<b>flameproof luminaire for Zone 2/22</b>	<b>19</b>
531 43 01 EM	LINEX	flameproof luminaire for Zone 2/22	19
531 43 02	LINEX	flameproof luminaire for Zone 2/22	19
531 43 05	LINEX	flameproof luminaire for Zone 2/22	19
531 43 05 EM	LINEX	flameproof luminaire for Zone 2/22	19
531 43 06	LINEX	flameproof luminaire for Zone 2/22	19
<b>541 01 15</b>	<b>MERIDIAN</b>	<b>industrial luminaire</b>	<b>36</b>
541 01 25	MERIDIAN	industrial luminaire	36
541 01 26	MERIDIAN	industrial luminaire	36
541 01 27	MERIDIAN	industrial luminaire	36
541 01 40	MERIDIAN	industrial luminaire	36
541 01 41	MERIDIAN	industrial luminaire	36
541 01 42	MERIDIAN	industrial luminaire	36
541 01 50	MERIDIAN	industrial luminaire	36
<b>541 04 15 AISi</b>	<b>MERIDIAN AISi</b>	<b>industrial luminaire</b>	<b>36</b>
541 04 25 AISi	MERIDIAN AISi	industrial luminaire	36
541 04 26 AISi	MERIDIAN AISi	industrial luminaire	36
541 04 27 AISi	MERIDIAN AISi	industrial luminaire	36
541 04 40 AISi	MERIDIAN AISi	industrial luminaire	36
541 04 41 AISi	MERIDIAN AISi	industrial luminaire	36
541 04 42 AISi	MERIDIAN AISi	industrial luminaire	36
541 04 50 AISi	MERIDIAN AISi	industrial luminaire	36
<b>541 17 01</b>	<b>FARMER II</b>	<b>industrial luminaire</b>	<b>31</b>
<b>541 18 01 t</b>	<b>FARMER III</b>	<b>industrial luminaire</b>	<b>32</b>
541 18 02 t	FARMER III	industrial luminaire	32
541 18 03 F	FARMER III	industrial luminaire	32
541 18 04 F	FARMER III	industrial luminaire	32
<b>541 19 01</b>	<b>TITAN</b>	<b>floodlight</b>	<b>41</b>
541 19 02	TITAN	floodlight	41
<b>541 24 01</b>	<b>FARMER II</b>	<b>industrial luminaire</b>	<b>31</b>
541 24 01 EP	FARMER II	industrial luminaire	31
<b>541 33 02</b>	<b>MINEX I</b>	<b>flameproof luminaire for Zone 1/21</b>	<b>9</b>
<b>541 33 03</b>	<b>ORION</b>	<b>flameproof luminaire for Zone 1/21</b>	<b>10</b>
541 33 03 t	ORION	flameproof luminaire for Zone 1/21	10
541 33 04	ORION	flameproof luminaire for Zone 1/21	10
541 33 04 t	ORION	flameproof luminaire for Zone 1/21	10
541 33 04 F	ORION	flameproof luminaire for Zone 1/21	10
541 33 06	ORION	flameproof luminaire for Zone 1/21	10
541 33 06 t	ORION	flameproof luminaire for Zone 1/21	10
541 33 06 F	ORION	flameproof luminaire for Zone 1/21	10

Type	Model	Purpose	Page
<b>541 38 03</b>	<b>HERKULES</b>	<b>flameproof luminaire for Zone 1/21</b>	<b>13</b>
541 38 03 t	HERKULES	flameproof luminaire for Zone 1/21	13
541 38 04	HERKULES	flameproof luminaire for Zone 1/21	13
541 38 04 t	HERKULES	flameproof luminaire for Zone 1/21	13
541 38 05	HERKULES	flameproof luminaire for Zone 1/21	13
541 38 05 t	HERKULES	flameproof luminaire for Zone 1/21	13
541 38 05 Ft	HERKULES	flameproof luminaire for Zone 1/21	13
541 38 06	HERKULES	flameproof luminaire for Zone 1/21	13
541 38 06 t	HERKULES	flameproof luminaire for Zone 1/21	13
541 38 06 Ft	HERKULES	flameproof luminaire for Zone 1/21	13
541 38 07	HERKULES	flameproof luminaire for Zone 1/21	13
541 38 07 t	HERKULES	flameproof luminaire for Zone 1/21	13
541 38 07 Ft	HERKULES	flameproof luminaire for Zone 1/21	13
541 38 08	HERKULES	flameproof luminaire for Zone 1/21	13
541 38 08 t	HERKULES	flameproof luminaire for Zone 1/21	13
<b>542 02 01</b>	<b>FARMER II</b>	<b>industrial luminaire</b>	<b>31</b>
542 07 01	FARMER II	industrial luminaire	31
543 01 01	FARMER II	industrial luminaire	31
543 05 01	FARMER II	industrial luminaire	31
<b>581 01 01</b>	<b>TUB</b>	<b>industrial luminaire</b>	<b>33</b>
581 01 02	TUB	industrial luminaire	33
<b>581 04 02</b>	<b>ORION</b>	<b>flameproof luminaire for 1/21</b>	<b>10</b>
581 04 02 t	ORION	flameproof luminaire for 1/21	10
581 04 02 F	ORION	flameproof luminaire for 1/21	10
<b>581 29 01</b>	<b>FARMER I</b>	<b>industrial luminaire</b>	<b>30</b>
<b>581 32 01 nEM</b>	<b>SAFELUX / MULTISAFE</b>	<b>flameproof luminaire for Zone 2/22</b>	<b>19</b>
<b>582 04 01</b>	<b>FARMER I</b>	<b>industrial luminaire</b>	<b>30</b>
583 04 01	FARMER I	industrial luminaire	30
<b>591 15 01</b>	<b>JUNIOR LED</b>	<b>industrial luminaire</b>	<b>25</b>
<b>591 15 01 n</b>	<b>ERIS LED</b>	<b>flameproof luminaire for Zone 2/22</b>	<b>14</b>
<b>591 31 01</b>	<b>PRACHO LED</b>	<b>industrial luminaire</b>	<b>29</b>
591 31 02	PRACHO LED	industrial luminaire	29
591 31 03	PRACHO LED	industrial luminaire	29
591 31 04	PRACHO LED	industrial luminaire	29
591 31 06	PRACHO LED	industrial luminaire	29
591 31 07	PRACHO LED	industrial luminaire	29
591 31 08	PRACHO LED	industrial luminaire	29
591 31 09	PRACHO LED	industrial luminaire	29
<b>591 32 01 n</b>	<b>BILUX LED</b>	<b>flameproof luminaire for Zone 2/22</b>	<b>14</b>
591 32 01 nt	BILUX LED	flameproof luminaire for Zone 2/22	14
<b>591 32 01 nEM</b>	<b>MULTISAFE LED</b>	<b>flameproof luminaire for Zone 2/22</b>	<b>15</b>
<b>591 33 02 n</b>	<b>TRILUX LED</b>	<b>flameproof luminaire for Zone 2/22</b>	<b>15</b>
<b>591 34 01</b>	<b>TUB LED</b>	<b>industrial luminaire</b>	<b>27</b>
591 34 01 t	TUB LED	industrial luminaire	27
591 34 01 EM	TUB LED	industrial luminaire	27
<b>591 34 02 EM</b>	<b>TUB LED</b>	<b>industrial luminaire</b>	<b>27</b>
<b>591 35 01</b>	<b>TURTLE LED</b>	<b>industrial luminaire</b>	<b>28</b>
<b>591 36 01</b>	<b>FARMER I LED</b>	<b>industrial luminaire</b>	<b>26</b>
<b>591 36 02</b>	<b>FARMER I LED</b>	<b>industrial luminaire</b>	<b>26</b>
<b>591 37 01</b>	<b>FARMER II LED</b>	<b>industrial luminaire</b>	<b>26</b>
591 37 03	FARMER II LED	industrial luminaire	26
<b>591 39 04</b>	<b>ORION LED</b>	<b>flameproof luminaire for Zone 1/21</b>	<b>10</b>
<b>591 40 01</b>	<b>MINIMINEX LED</b>	<b>flameproof luminaire for mines</b>	<b>8</b>
591 41 01	PEGAS LED	industrial luminaire	25

Type	Model	Purpose		Page
<b>591 42 01</b>	<b>ZONEX LED</b>	<b>flameproof luminaire for Zone 1/21</b>	<b>Coming soon</b>	<b>22</b>
591 42 01 EM	ZONEX LED	flameproof luminaire for Zone 1/21	Coming soon	22
591 42 02	ZONEX LED	flameproof luminaire for Zone 1/21	Coming soon	22
591 42 02 EM	ZONEX LED	flameproof luminaire for Zone 1/21	Coming soon	22
<b>591 43 01</b>	<b>LINEX LED</b>	<b>flameproof luminaire for Zone 2/22</b>	<b>Coming soon</b>	<b>23</b>
591 43 02	LINEX LED	flameproof luminaire for Zone 2/22	Coming soon	23
591 43 03	LINEX LED	flameproof luminaire for Zone 2/22	Coming soon	23
591 43 04	LINEX LED	flameproof luminaire for Zone 2/22	Coming soon	23
591 43 05	LINEX LED	flameproof luminaire for Zone 2/22	Coming soon	23
591 43 06	LINEX LED	flameproof luminaire for Zone 2/22	Coming soon	23
591 43 07	LINEX LED	flameproof luminaire for Zone 2/22	Coming soon	23
591 43 08	LINEX LED	flameproof luminaire for Zone 2/22	Coming soon	23
<b>591 44 01</b>	<b>SIRIUS LED</b>	<b>flameproof luminaire for Zone 1/21</b>	<b>Coming soon</b>	<b>22</b>
591 44 02	SIRIUS LED	flameproof luminaire for Zone 1/21	Coming soon	22
591 44 03	SIRIUS LED	flameproof luminaire for Zone 1/21	Coming soon	22
<b>591 45 01</b>	<b>HERKULES LED</b>	<b>flameproof luminaire for Zone 1/21</b>	<b>Coming soon</b>	<b>23</b>
591 45 02	HERKULES LED	flameproof luminaire for Zone 1/21	Coming soon	23
<b>592 36 03</b>	<b>FARMER I LED</b>	<b>industrial luminaire</b>		<b>26</b>
<b>592 37 03</b>	<b>FARMER II LED</b>	<b>industrial luminaire</b>		<b>26</b>
<b>593 36 04</b>	<b>FARMER I LED</b>	<b>industrial luminaire</b>		<b>26</b>
<b>593 37 04</b>	<b>FARMER II LED</b>	<b>industrial luminaire</b>		<b>26</b>
<b>604.6 ntA</b>	<b>BOX 2</b>	<b>flameproof luminaire for Zone 2/22</b>		<b>21</b>
604.6 ntB	BOX 2	flameproof luminaire for Zone 2/22		21
604.6 nFtA	BOX 2	flameproof luminaire for Zone 2/22		21
604.6 nFtB	BOX 2	flameproof luminaire for Zone 2/22		21
<b>622.1 ES</b>	<b>BOX T</b>	<b>ballast box for floodlights</b>		<b>41</b>
622.2 ES	BOX T	ballast box for floodlights		41
<b>713 01 02</b>	<b>SPOT I</b>	<b>floodlight</b>		<b>42</b>
<b>723 01 01</b>	<b>HALSPOT I</b>	<b>floodlight</b>		<b>40</b>
<b>723 04 02</b>	<b>HALSPOT II</b>	<b>floodlight</b>		<b>40</b>
<b>743 01 02</b>	<b>SPOT I</b>	<b>floodlight</b>		<b>42</b>
743 01 03	SPOT I	floodlight		42
<b>743 01 05</b>	<b>SPOT II</b>	<b>floodlight</b>		<b>42</b>
743 01 06	SPOT II	floodlight		42
743 01 07	SPOT II	floodlight		42
743 01 08	SPOT II	floodlight		42
743 01 09	SPOT II	floodlight		42
743 01 10	SPOT II	floodlight		42
<b>743 02 70</b>	<b>RPG I, II</b>	<b>floodlight</b>		<b>40</b>
743 02 10	RPG I, II	floodlight		40
743 02 15	RPG I, II	floodlight		40
743 03 25	RPG I, II	floodlight		40
743 03 40	RPG I, II	floodlight		40

## References



*Gas Processing Plant of OOO GAZPROM Pererabotka, Sosnogorsk, Russia*



*Chemical plant Phosagro Cherepovets in Russia*



*Chemical plant Azomures in Romania*



*Aluminum plant in Dubai*



**Czech manufacturer of lighting technology  
with 100-year tradition**

**ELEKTROSVIT Svatoborice, a.s.**

Nadrazni 1290/44

696 04 Svatoborice-Mistrin

Czech Republic

ID: 49437313, VAT: CZ49437313

**[www.elektrosvit.cz](http://www.elektrosvit.cz)**