


**6387 Step Tondo**

- .01 Bianco - White
- .45 Alluminio anodizzato - Aluminium anodized

Color temperature	Light sources	lm
<b>/W</b> 4000K	LED max 2W 500mA	209lm
<b>/WW</b> 3000K	LED max 2W 500mA	199lm
<b>/XW</b> 2700K	LED max 2W 500mA	189lm

IP55 3000h 50000h R 0,24 Kg

Versione ETL disponibile a richiesta.  
ETL version available upon request.

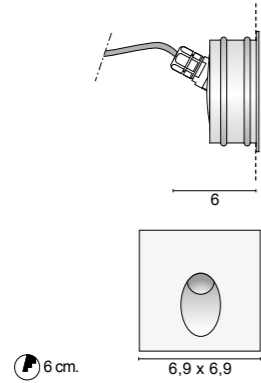


**6369 Step Quadro**

- .01 Bianco - White
- .45 Alluminio anodizzato - Aluminium anodized

Color temperature	Light sources	lm
<b>/W</b> 4000K	LED max 2W 500mA	209lm
<b>/WW</b> 3000K	LED max 2W 500mA	199lm
<b>/XW</b> 2700K	LED max 2W 500mA	189lm

IP55 3000h 50000h R 0,24 Kg

Versione ETL disponibile a richiesta.  
ETL version available upon request.

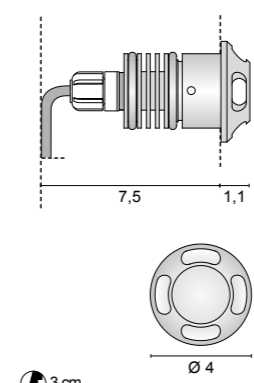

**6361 Kross**

- .33 Acciaio satinato - Matt steel
- Inox AISI 316L


Color temperature	Light sources	lm
<b>/B</b> LED BLU	LED max 2W 500mA	209lm
<b>/W</b> 4000K	LED max 2W 500mA	209lm
<b>/WW</b> 3000K	LED max 2W 500mA	199lm

IP67 3000h 50000h R 0,10 Kg

Versione ETL disponibile a richiesta.  
ETL version available upon request.




Molla per cartongesso inclusa  
Spring for plasterboard included  
3,2 cm.



.33/W



.33/WW



.33/B

Outdoor

Accessori - Accessories



**0232**  
Cassaforma da parete  
Wall plastic box



Accessori - Accessories




**0216**  
Controcassa in materiale plastico  
Plastic box



**0220**  
KIT: cassaforma drenante + Conettore IP  
KIT: draining junction + IP connector

Outdoor

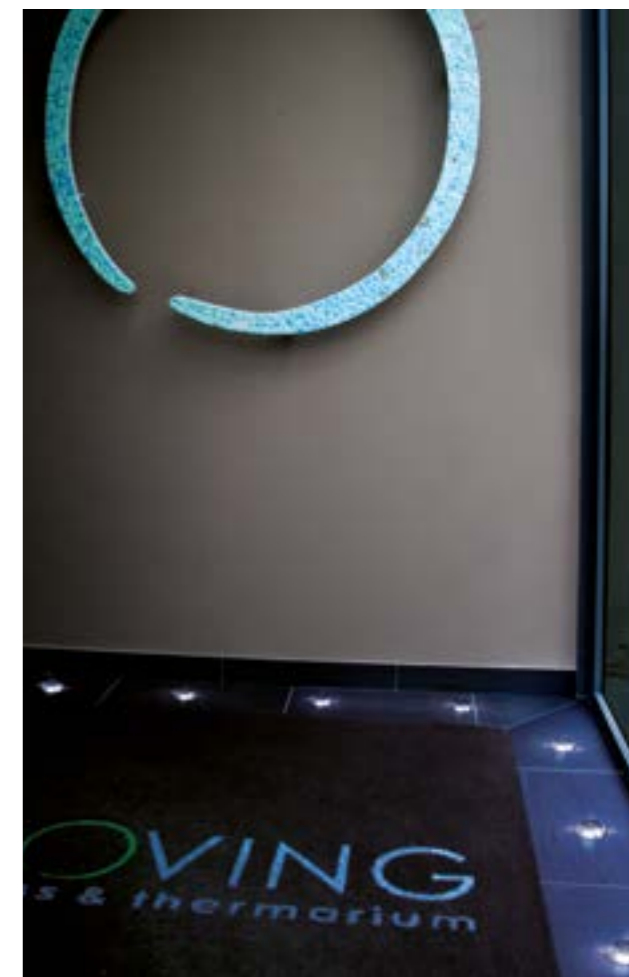

Cod.	Drivers ON/OFF			IP67 drivers		DIMMABLE drivers			
	0125 350mA	0128 350mA	0127 500mA	0031/IP 350mA	0143/IP 500mA	0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145/DALI DIM DALI	0145 DIM
6387	1-6	1-10	1-6	1-10	1-7	1-12	1-12	1-21	1-21
6369	1-6	1-10	1-6	1-10	1-7	1-12	1-12	1-21	1-21

Solo collegamento in serie - Only serial connection

Cod.	Drivers ON/OFF			IP67 drivers		DIMMABLE drivers			
	0125 350mA	0128 350mA	0127 500mA	0031/IP 350mA	0143/IP 500mA	0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145/DALI DIM DALI	0145 DIM
6361	1-6	1-10	1-6	1-10	1-7	1-12	1-12	1-21	1-21

Solo collegamento in serie - Only serial connection